


OUTDOOR



ESOLUCE

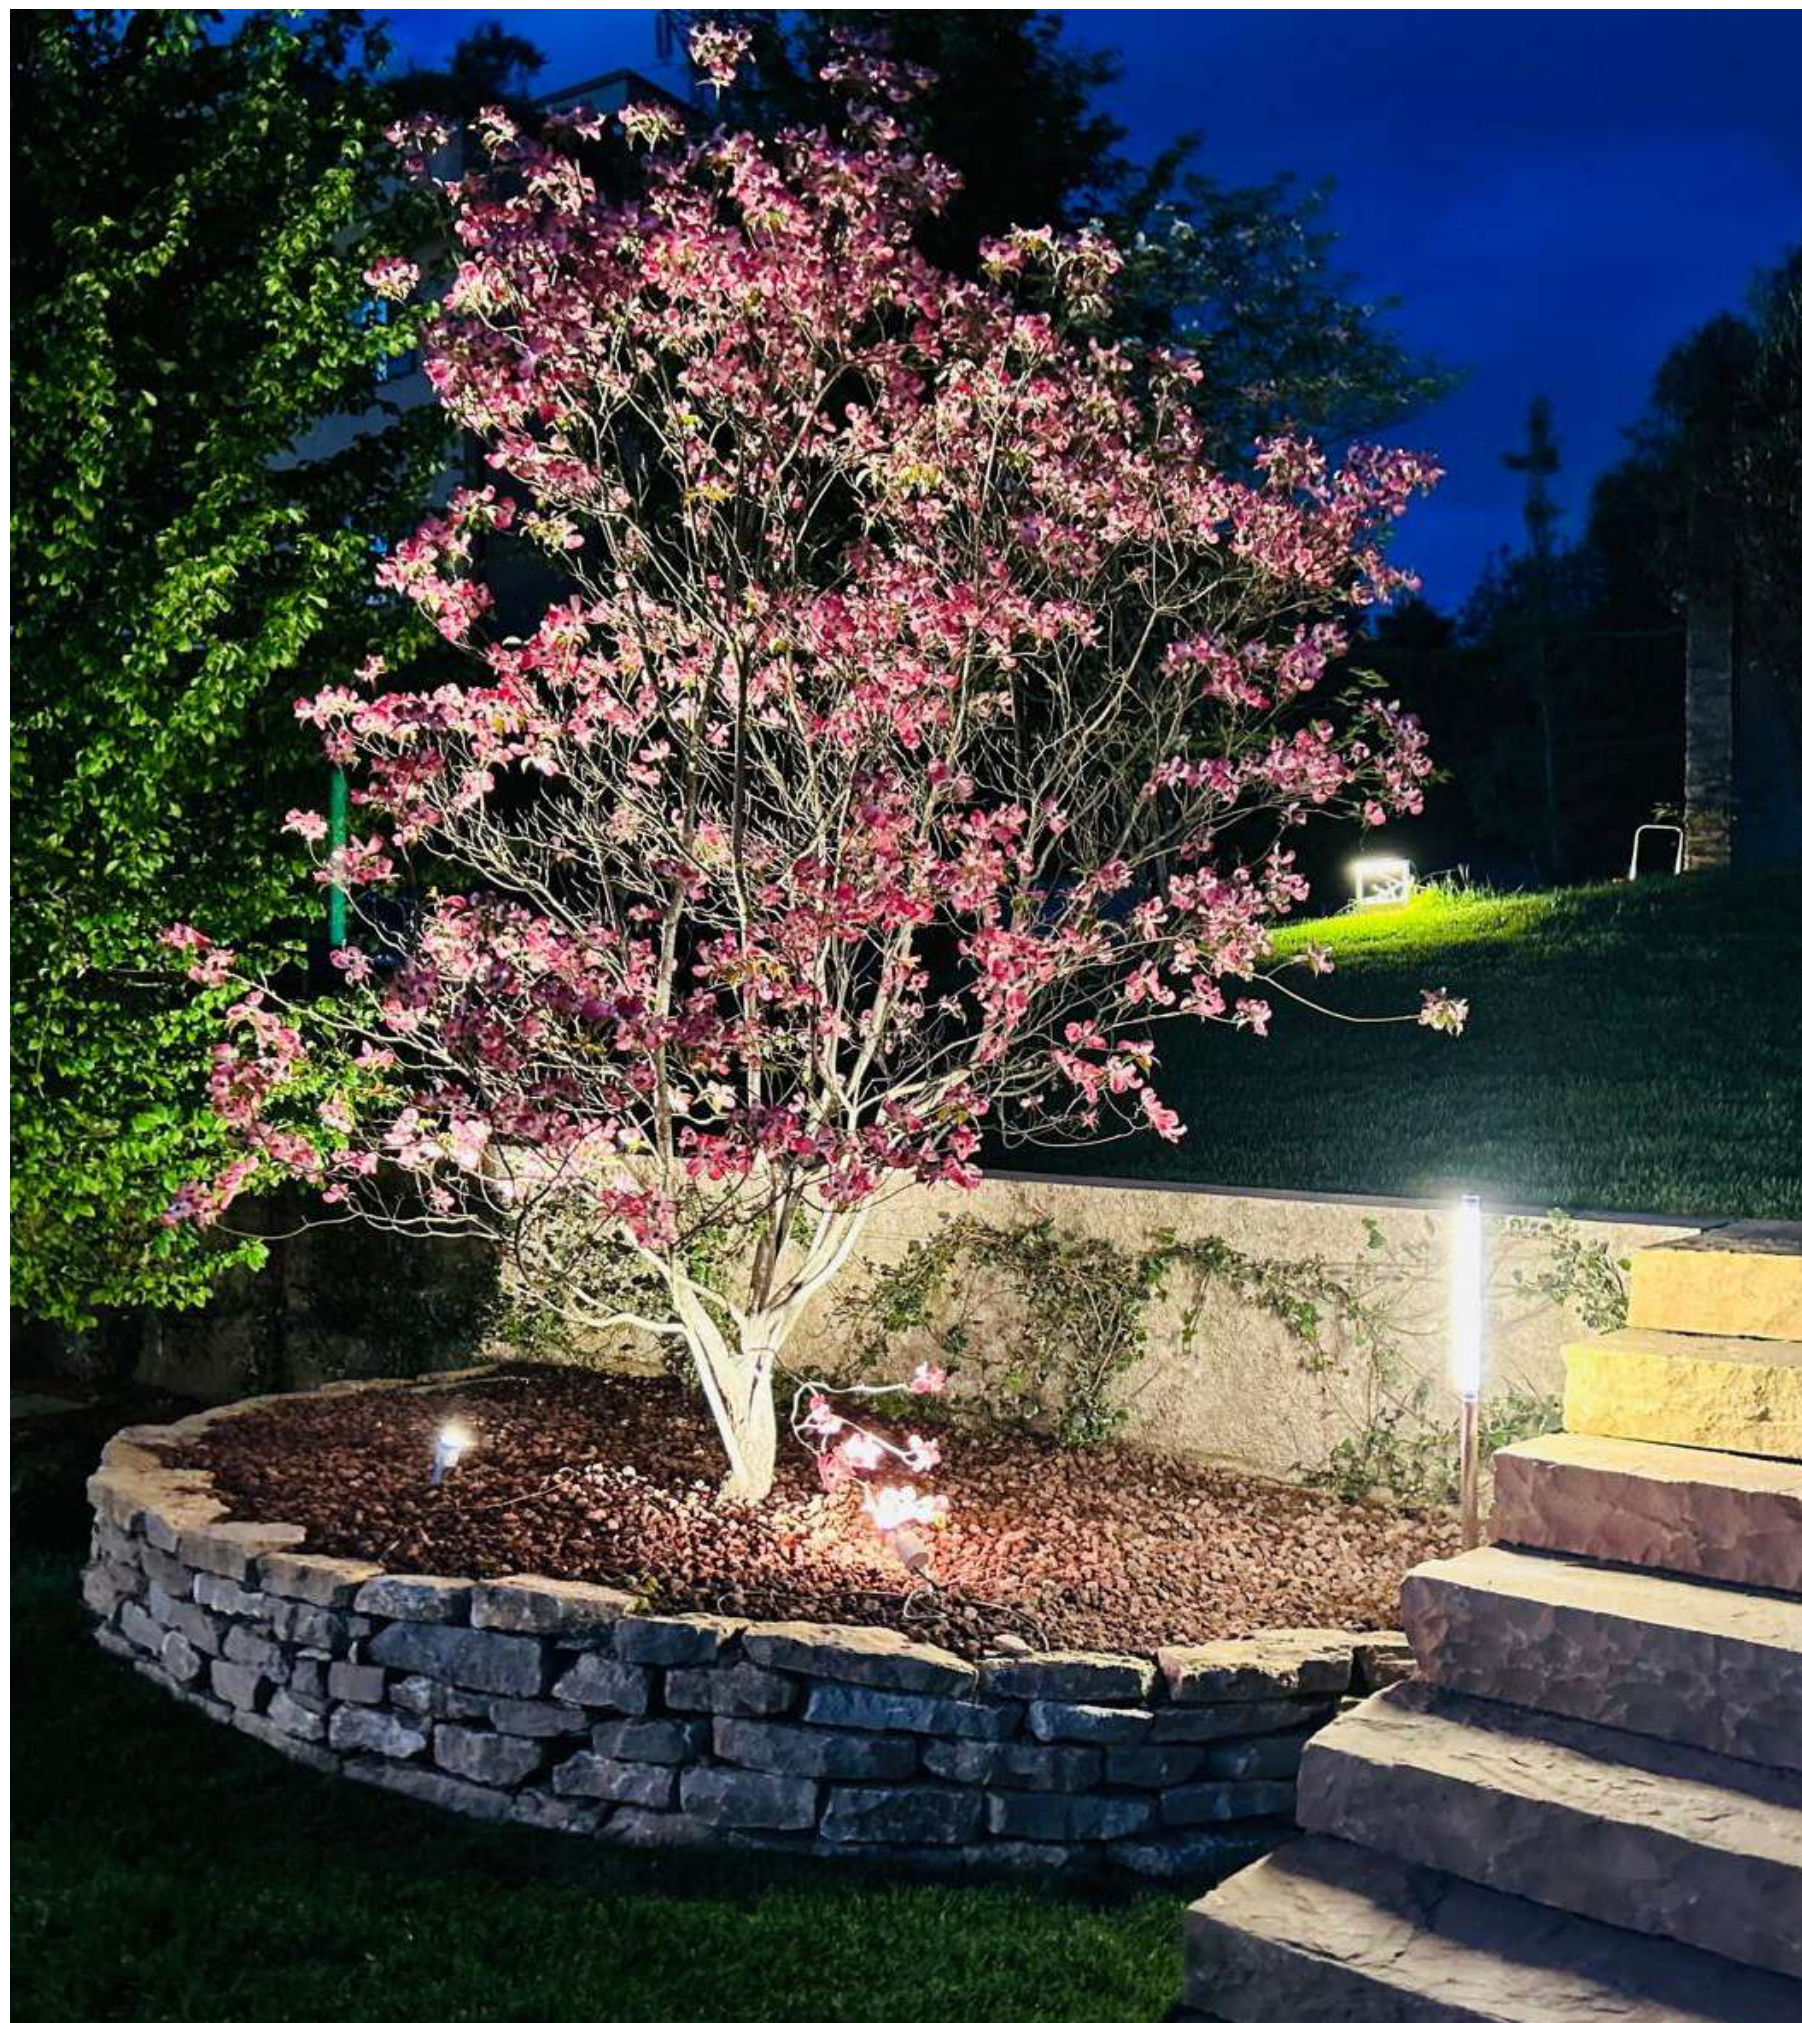

A good outdoor lighting design can really boost the vibe of a space and make people feel more comfortable and at ease. It can also bring out special architectural features, making the place even more inviting. But remember, outdoor lighting isn't just about looking pretty, it's mostly about safety. A well-lit environment helps people stay safe by clearly highlighting obstacles, stairs, and passageways.

Un buon progetto di illuminazione esterna può davvero dare un impulso all'atmosfera di uno spazio e far sentire le persone più comode e a proprio agio. Può anche far risaltare particolari caratteristiche architettoniche, rendendo il luogo ancora più invitante. Ma ricordate che l'illuminazione esterna non riguarda solo l'aspetto estetico, ma soprattutto la sicurezza. Un ambiente ben illuminato aiuta le persone a stare al sicuro, evidenziando chiaramente ostacoli, scale e passaggi.

MATERIALS THAT MATTER: DURABILITY MEETS DESIGN

MATERIALS

We are committed to creating products with a long-lasting life, and it all begins with the right materials.

- **316L Stainless Steel and marine-grade brass** excel in coastal locales, where salt spray would corrode lesser metals within months. Their natural resistance to chlorides and humidity keeps fixtures looking pristine.
- **Marine grade coating** is a type of surface treatment designed to protect materials (usually metal or wood) from weathering, chemicals and UV radiation in marine or highly corrosive environments. Marine grade paint can last for years without the need for touch-ups.
- **Anodising aluminium** is an electrochemical treatment used to create a protective layer of aluminium oxide on the surface of the metal, making it more resistant to corrosion, wear, scratches and weathering. When we speak of 20 micron outdoor anodising, we are referring to a process specifically designed to offer durable protection in outdoor environments, including more aggressive ones such as coastal areas. Anodised aluminium can be coloured and retains its appearance over time.
- **UV-stabilized polycarbonate or ASA plastics** are your friend under relentless sun—they won’t yellow, crack or become brittle over the seasons.

IP

When planning, always look for the IP code: the first digit (4–6) rates **dust and solid ingress**, the second (4–8) rates **water resistance**. Covered verandas might safely use IP44 fixtures, but pool decks and exposed walls should aim for IP65 or higher. And remember: a single compromised lens or cracked seal can let moisture in and drastically shorten a fixture’s lifespan.

MATERIALI

Lavoriamo per creare prodotti che durino a lungo, e tutto inizia con i materiali giusti.

- **Acciaio inox 316L e ottone marino** sono ideali in ambienti costieri, dove la salsedine corroderà rapidamente materiali inferiori. Questi metalli resistono naturalmente ai cloruri e all’umidità.
- **Verniciatura “marine grade”** è un tipo di trattamento superficiale pensato per proteggere materiali (in genere metallo o legno) da agenti atmosferici, chimici e raggi UV in ambienti marini o altamente corrosivi. La vernice marine grade può durare anni senza necessità di ritocchi.
- **Anodizzazione dell’alluminio** è un trattamento elettrochimico che serve a creare uno strato protettivo di ossido di alluminio sulla superficie del metallo, rendendolo più resistente alla corrosione, ai graffi e agli agenti atmosferici. Quando si parla di anodizzazione per esterno a 20 micron, si fa riferimento a un processo specificamente progettato per offrire una protezione durevole in ambienti esterni, inclusi quelli più aggressivi come le zone costiere. Può essere colorato e mantiene l’aspetto a lungo nel tempo.
- **Policarbonato UV-stabilizzato o plastica ASA** sono la scelta giusta sotto il sole cocente: non ingialliscono né si spezzano col tempo.

IP

Controlla sempre il codice IP: la prima cifra (4–6) indica la protezione da **corpi solidi**, la seconda (4–8) da **liquidi**. Verande coperte possono utilizzare apparecchi IP44, ma per bordi piscina o pareti esposte serve almeno IP65. Ricorda: una sola guarnizione danneggiata può compromettere tutto il sistema.



LAYOUT

Product Name	Technical drawings	Typology symbol
TRILLI	 3547 0,15 Kg .35 Shiny Copper /W 4000K LED W/ 300mA 108lm /WW 3000K LED W/ 300mA 110lm /XW 2700K LED W/ 300mA 110lm      Modifiable and adjustable  3549 0,40 Kg .35 Shiny Copper /W 4000K LED W/ 300mA 108lm /WW 3000K LED W/ 300mA 110lm /XW 2700K LED W/ 300mA 110lm      Modifiable and adjustable  3548 0,28 Kg .35 Shiny Copper /W 4000K LED W/ 300mA 108lm /WW 3000K LED W/ 300mA 110lm /XW 2700K LED W/ 300mA 110lm      Modifiable and adjustable   FINISHES CODES  .35 Shiny Copper	1 108 109
Product Code	Technical data	Technical symbols
Product picture		

PRODUCT SPECIFICATIONS

Characters in **bold** are used for codes and specifications which are necessary to identify the product code to be specified in the order.

I caratteri in grassetto sono utilizzati per i codici e le specifiche sono utilizzati per identificare il codice prodotto da includere nell'ordine.

2525_.../...		0.06 Kg
.01	White	☐
.02	Black	☒
/W	4000K LED 5,2W	1080lm
/WW	3000K LED 5,2W	1030lm
/XW	2700K LED 5,2W	955lm

SYMBOLS

	Suspension
	Cable
	Track
	Wall
	Ceiling
	Recessed Wall
	Recessed Ceiling
	Table
	Floor
	Converter included
	Converter not included
	Cable length
	Dimmer included
	CRI Color Rendering Index
	Reparable fixture
	Rotation
	Beam angle
IP65	Protection class
	Cut Out
	Walk over fitting
	Drive over fitting
	Surface Temperature

MARKS

	Fixture on Class II, with double or reinforced insulation
	SELV fixture with remote transformer
	Fixture ready for installation on normally inflammable surfaces

ACCESSORIES CODES

	/DIM	Dimmer	/EM	Emergency
	/DIM	Dimmer	/ST	Satin diffuser
	/DALI	Dimmer	/TR	Transparent diffuser

IP

1st digit: protection against penetration by solid bodies	2nd digit: protection against penetration by water
0 No protection	0 No protection
1 Protected against solid matters (over 50mm)	1 Protected against drops of water falling vertically
2 Protected against solid matters (over 12mm)	3 Rain proof fixture
3 Protected against solid matters (over 2,5mm)	4 Splash proof fixture
4 Protected against solid matters (over 1mm)	5 Water jet proof
5 Dust proof	6 Wave proof
6 Fully dust proof	7 Watertight immersion fixture

OUTDOOR



Cerchio
138



Drive
162



Drum
226



Jazz
214



Eclipse IP
122



Kross
146



Kross Mini
148



Lara
132



Raccordi di luce Joy
78



Raccordi di luce Joy
78



Raccordi di luce Joy
78




Raccordi di luce Joy
84



Raccordi di luce Joy System
86



Raccordi di luce Joy System
86



Raccordi di luce Joy System
90



Roc
220



Soft
174



Spillo
70



Spook
42

OUTDOOR



Step Mini
180



Trilli
108



Tris
168



Vision 01
58



Vision 02
60



Vision 03
62



Vista
154



Vista Mini
156



Wanda
14



Wanda System
32



Zeppelin Mini
204



Zeppelin Mini Plus
206



Zeppelin
192



Zeppelin Plus
198



Zeppelin Maxi COB
202



Zeppelin Maxi
200



Zeppelin Adjustable
208

INDOOR / OUTDOOR


WANDA

Design U.T. EgoLucé





WANDA




IP67 adjustable light bar for wall and ceiling or suspension applications with diffused light made of transparent anti-UV coextruded methacrylate and terminals in stainless steel. Wanda is offered in different modular lengths from 18 cm up to 298 cm and in three shades of light, 2700K, 3000K, and 4000K, with CRI>90. This simple yet effective illumination offers creative solutions for various environments, from offices and kitchens to outdoor poolside and gardens.

Barra luminosa orientabile IP67 per applicazioni a parete e a soffitto o a sospensione con luce diffusa in metacrilato coestruso trasparente anti-UV e terminali in acciaio inox. Wanda è disponibile in diverse lunghezze modulari da 18 cm a 298 cm e in tre tonalità di luce, 2700K, 3000K e 4000K, con CRI>90. Questa illuminazione semplice ma efficace offre soluzioni creative per diversi ambienti, da uffici e cucine a bordi di piscine e giardini esterni.

Verstellbarer IP67-Lichtbalken für Wand-, Decken- oder Hängeanwendungen mit diffusem Licht aus transparentem, UV-beständigem, koextrudiertem Methacrylat und Anschlüssen aus Edelstahl. Wanda wird in verschiedenen modularen Längen von 18 cm bis 298 cm und in drei Lichtfarben, 2700K, 3000K und 4000K, mit einem CRI>90 angeboten. Diese einfache, aber effektive Beleuchtung bietet kreative Lösungen für verschiedene Umgebungen, von Büros und Küchen bis hin zu Außenpools und Gärten.







4536.33/ 0,50 Kg

.33 Stainless Steel AISI 316L

/W	4000K	LED 24V 7,5W	920lm
/WW	3000K	LED 24V 7,5W	825lm
/XW	2700K	LED 24V 7,5W	780lm




ETL version available upon request




4537.33/ 1,00 Kg

.33 Stainless Steel AISI 316L

/W	4000K	LED 24V 16,5W	2024lm
/WW	3000K	LED 24V 16,5W	1815lm
/XW	2700K	LED 24V 16,5W	1716lm



ETL version available upon request




4538.33 0,50 Kg

.33 Stainless Steel AISI 316L

LED 24V 7,2W



ETL version available upon request



4539.33 1,00 Kg

.33 Stainless Steel AISI 316L

LED 24V 16,5W



ETL version available upon request

DRIVERS

ON/OFF

Cod.	0155	0156	0169	0157	0161/100	0161/150
	24V-13W	24V-20W	24V-60W	24V-75W	24V-100W	24V-150W

IP67 DRIVERS

Cod.	0033/IP	0034/IP	0038/IP	0035/IP
	24V 14,4W	24V 70W	24V 100W	24V 160W

DIMMABLE DRIVERS

Cod.	0717/DIM60/V	0717/DIM60	0717/DIM100	0717/DIM150
	24V-60W 1... 10V	24V-60W PUSH - DALI	24V-100W 1... 10V - PUSH - DALI	24V-150W 1... 10V - PUSH - DALI

DIMMABLE DRIVERS - PHASE CUT-OFF

Cod.	0727/DIM30	0727/DIM50	0717/DIM100/T	0717/DIM150/T
	24V-30W TRIAC	24V-50W TRIAC	24V-100W TRIAC	24V-150W TRIAC

Only Parallel Connection

DRIVER RGB

0164	0167	0163	0165	0166
120W	22W	IR Sensor	IR Remote controller	Sync Cable

IN 230V - OUT 3 X 24V

LED EMERGENCY UNIT

0115/EM
INVERTER + BATTERY + LED INDICATOR



CUSTOM SIZE

Table of available lengths. Measures are referred to complete fixtures including closing heads.


cm	watt	2700K	lm	3000K	lm	4000K	lm	RGB
18	1,5W	A4536.33/18/XW	152	A4536.33/18/WW	165	A4536.33/18/W	184	A4536.33/18RGB
28	3W	A4536.33/28/XW	312	A4536.33/28/WW	330	A4536.33/28/W	368	A4536.33/28RGB
38	4,5W	A4536.33/38/XW	468	A4536.33/38/WW	495	A4536.33/38/W	552	A4536.33/38RGB
48	6W	A4536.33/48/XW	624	A4536.33/48/WW	660	A4536.33/48/W	736	A4536.33/48RGB
58	7,5W	4536.33/XW	780	4536.33/WW	825	4536.33/W	920	4538.33
68	9W	A4536.33/68/XW	936	A4536.33/68/WW	990	A4536.33/68/W	1104	A4536.33/68RGB
78	10,5W	A4536.33/78/XW	1092	A4536.33/78/WW	1155	A4536.33/78/W	1288	A4536.33/78RGB
88	12W	A4536.33/88/XW	1248	A4536.33/88/WW	1320	A4536.33/88/W	1472	A4536.33/88RGB
98	13,5W	A4536.33/98/XW	1404	A4536.33/98/WW	1485	A4536.33/98/W	1656	A4536.33/98RGB
108	15W	A4536.33/108/XW	1560	A4536.33/108/WW	1650	A4536.33/108/W	1840	A4536.33/108RGB
118	16,5W	4537.33/XW	1716	4537.33/WW	1815	4537.33/W	2024	4539.33
128	18W	A4536.33/128/XW	1872	A4536.33/128/WW	1980	A4536.33/128/W	2208	A4536.33/128RGB
138	19,5W	A4536.33/138/XW	2028	A4536.33/138/WW	2145	A4536.33/138/W	2392	A4536.33/138RGB
148	21W	A4536.33/148/XW	2184	A4536.33/148/WW	2310	A4536.33/148/W	2576	A4536.33/148RGB
158	22,5W	A4536.33/158/XW	2340	A4536.33/158/WW	2475	A4536.33/158/W	2760	A4536.33/158RGB
168	24W	A4536.33/168/XW	2496	A4536.33/168/WW	2640	A4536.33/168/W	2944	A4536.33/168RGB
178	25,5W	A4536.33/178/XW	2652	A4536.33/178/WW	2805	A4536.33/178/W	3128	A4536.33/178RGB
188	27W	A4536.33/188/XW	2808	A4536.33/188/WW	2970	A4536.33/188/W	3312	A4536.33/188RGB
198	28,5W	A4536.33/198/XW	2964	A4536.33/198/WW	3135	A4536.33/198/W	3496	A4536.33/198RGB
208	30W	A4536.33/208/XW	3120	A4536.33/208/WW	3300	A4536.33/208/W	3680	A4536.33/208RGB
218	31,5W	A4536.33/218/XW	3276	A4536.33/218/WW	3465	A4536.33/218/W	3864	A4536.33/218RGB
228	33W	A4536.33/228/XW	3432	A4536.33/228/WW	3630	A4536.33/228/W	4048	A4536.33/228RGB
238	34,5W	A4536.33/238/XW	3588	A4536.33/238/WW	3795	A4536.33/238/W	4232	A4536.33/238RGB
248	36W	A4536.33/248/XW	3744	A4536.33/248/WW	3960	A4536.33/248/W	4416	A4536.33/248RGB
258	37,5W	A4536.33/258/XW	3900	A4536.33/258/WW	4125	A4536.33/258/W	4600	A4536.33/258RGB
268	39W	A4536.33/268/XW	4056	A4536.33/268/WW	4290	A4536.33/268/W	4784	A4536.33/268RGB
278	40,5W	A4536.33/278/XW	4212	A4536.33/278/WW	4455	A4536.33/278/W	4968	A4536.33/278RGB
288	42W	A4536.33/288/XW	4368	A4536.33/288/WW	4620	A4536.33/288/W	5152	A4536.33/288RGB
298	43,5W	A4536.33/298/XW	4524	A4536.33/298/WW	4785	A4536.33/298/W	5336	A4536.33/298RGB

FINISHES CODES



.33 Stainless Steel
AISI 316L



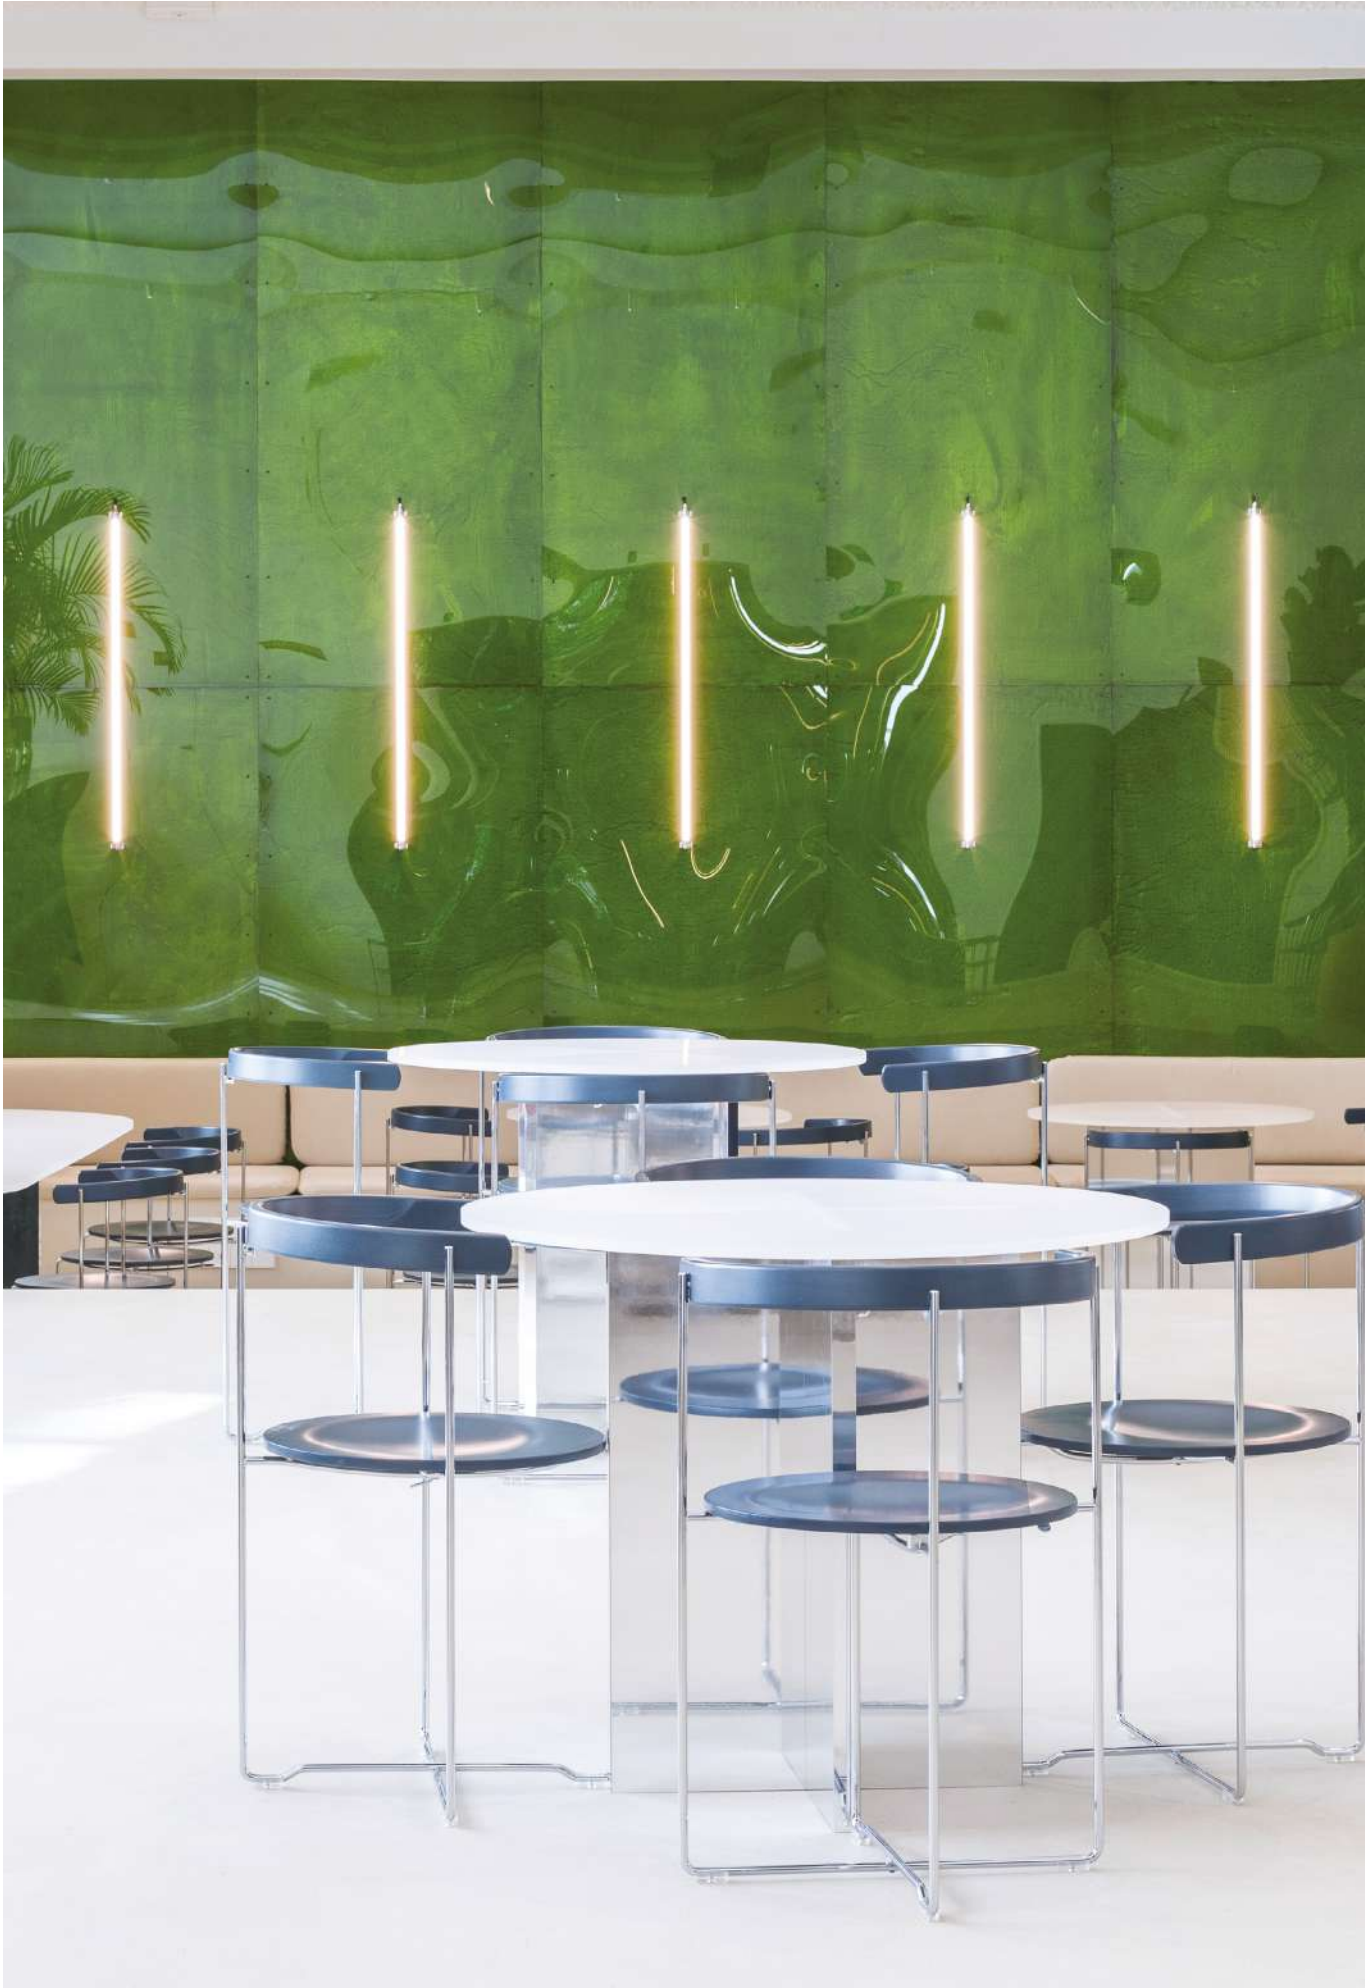

Cobra studios design, HUGUES DELAUNAY & KENNY DECOMMER




Cobra studios design, HUGUES DELAUNAY & KENNY DECOMMER





Cobra studios design, HUGUES DELAUNAY & KENNY DECOMMER




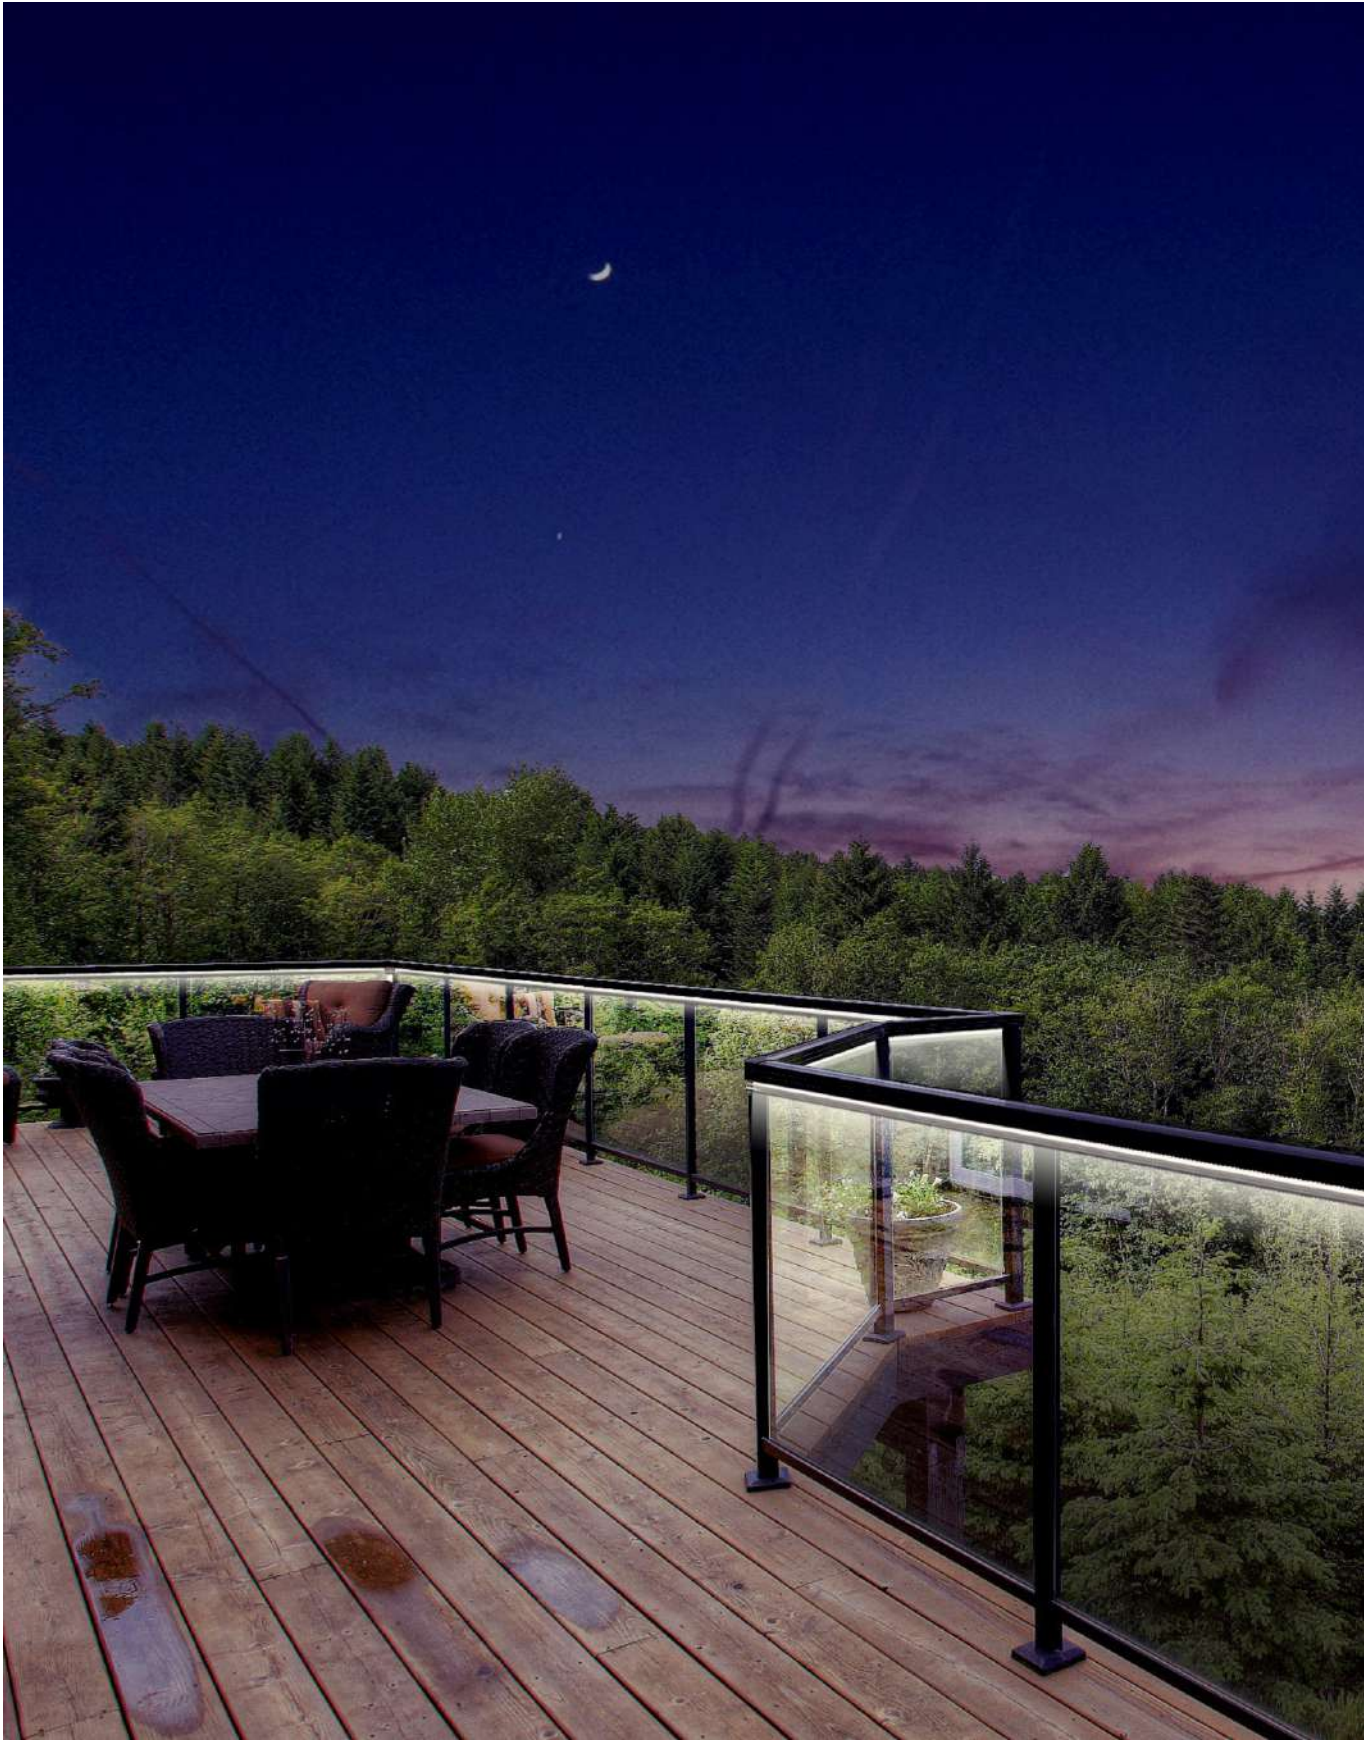






WANDA SYSTEM




1665.33/128/				1,10 Kg
.33	Stainless Steel AISI 316L			III
/128/W	4000K	LED 24V 18W	2208lm	
/128/WW	3000K	LED 24V 18W	1980lm	
/128/XW	2700K	LED 24V 18W	1872lm	




Suspension fixing kit supplied with the lamp



1665.33/178/				1,53 Kg
.33	Stainless Steel AISI 316L			III
/178/W	4000K	LED 24V 25,5W	3128lm	
/178/WW	3000K	LED 24V 25,5W	2805lm	
/178/XW	2700K	LED 24V 25,5W	2652lm	




Suspension fixing kit supplied with the lamp

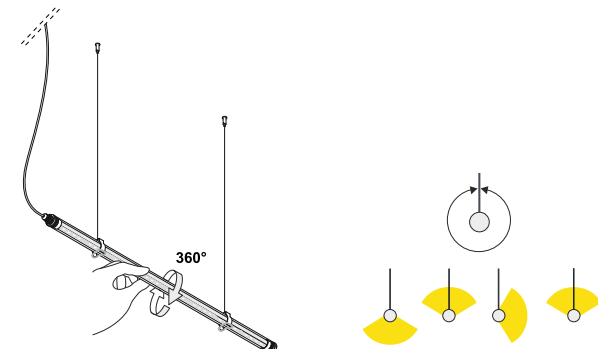

FINISHES CODES




.33 Stainless Steel
AISI 316L



1665.33/158/				1,36 Kg
.33	Stainless Steel AISI 316L			III
/158/W	4000K	LED 24V 22,5W	2760lm	
/158/WW	3000K	LED 24V 22,5W	2475lm	
/158/XW	2700K	LED 24V 22,5W	2340lm	



Suspension fixing kit supplied with the lamp



1665.33/208/				1,79 Kg
.33	Stainless Steel AISI 316L			III
/208/W	4000K	LED 24V 30W	3680lm	
/208/WW	3000K	LED 24V 30W	3300lm	
/208/XW	2700K	LED 24V 30W	3120lm	




Suspension fixing kit supplied with the lamp




CEILING ROSES FOR SUSPENSION SYSTEM 24V

WANDA system




Ceiling rose with **30W** driver 50/60Hz 220-230V

0990/300.50Kg		
.01	White	
.02	Black	
.23	Satin Aluminium	




Ceiling rose with **60W** driver 50/60Hz 220-230V

0990/600.70Kg		
.01	White	
.02	Black	
.85	Painted Silver	
.86	Painted Gold	
.87	Painted Copper	
.88	Painted Bronze	
/P	DIMMER	PUSHMAX 60W
/V	DIMMER	1...10VMAX 60W
/D	DIMMER	ballMAX 60W




Ceiling rose with **150W** driver 50/60Hz 220-230V

0990/1501.30Kg		
.01	White	
.02	Black	
.85	Painted Silver	
.86	Painted Gold	
.87	Painted Copper	
.88	Painted Bronze	
/P	DIMMER	PUSHMAX 150W
/V	DIMMER	1...10VMAX 150W
/D	DIMMER	ballMAX 150W
/T	DIMMER	TRIACMAX 150W




Ceiling rose with **60W** driver 50/60Hz 220-230V

0993/600.60Kg		
.01	White	
.02	Black with white base	
/P	DIMMER	PUSH
/V	DIMMER	1...10V
/D	DIMMER	ball



Ceiling rose with **100W** driver 50/60Hz 220-230V

0990/1001.30Kg		
.01	White	
.02	Black	
.85	Painted Silver	
.86	Painted Gold	
.87	Painted Copper	
.88	Painted Bronze	
/P	DIMMER	PUSHMAX 100W
/V	DIMMER	1...10VMAX 100W
/D	DIMMER	ballMAX 100W
/T	DIMMER	TRIACMAX 100W



Ceiling rose with **200W** driver 50/60Hz 220-230V

0990/2002.00kg		
.01	White	
.02	Black	
.85	Painted Silver	
.86	Painted Gold	
.87	Painted Copper	
.88	Painted Bronze	
/P	DIMMER	PUSHMAX 2x100W
/V	DIMMER	1...10VMAX 2x100W
/D	DIMMER	ballMAX 2x100W
/T	DIMMER	TRIACMAX 2x100W







OUTDOOR

SPOOK

Design U.T. EgoLuce





SPOOK



LED linear trampleable IP67 in coextruded transparent and opal methacrylate.

Modular anodized aluminium blind boxes (reinforced anodizing for outdoor).

To be installed into floor or wall and possibility to compose endless light lines.


LED lineare calpestabile IP67 in metacrilato coestruso trasparente e opale.

Scatole cieche modulari in alluminio anodizzato (anodizzazione rinforzata per esterni).


Da installare a pavimento o a parete e possibilità di comporre infinite linee luminose.

Begehbare LED Einbaulinie IP67, Struktur aus transparentem und opalisiertem fließgepresstem Methakrylat.

Modularen Einbaugehäuse aus Aluminium (verstärktem Eloxierung für Außenbereich) für wand-oder Boden-insetzung. Montage als endlose Linearsystem möglich.

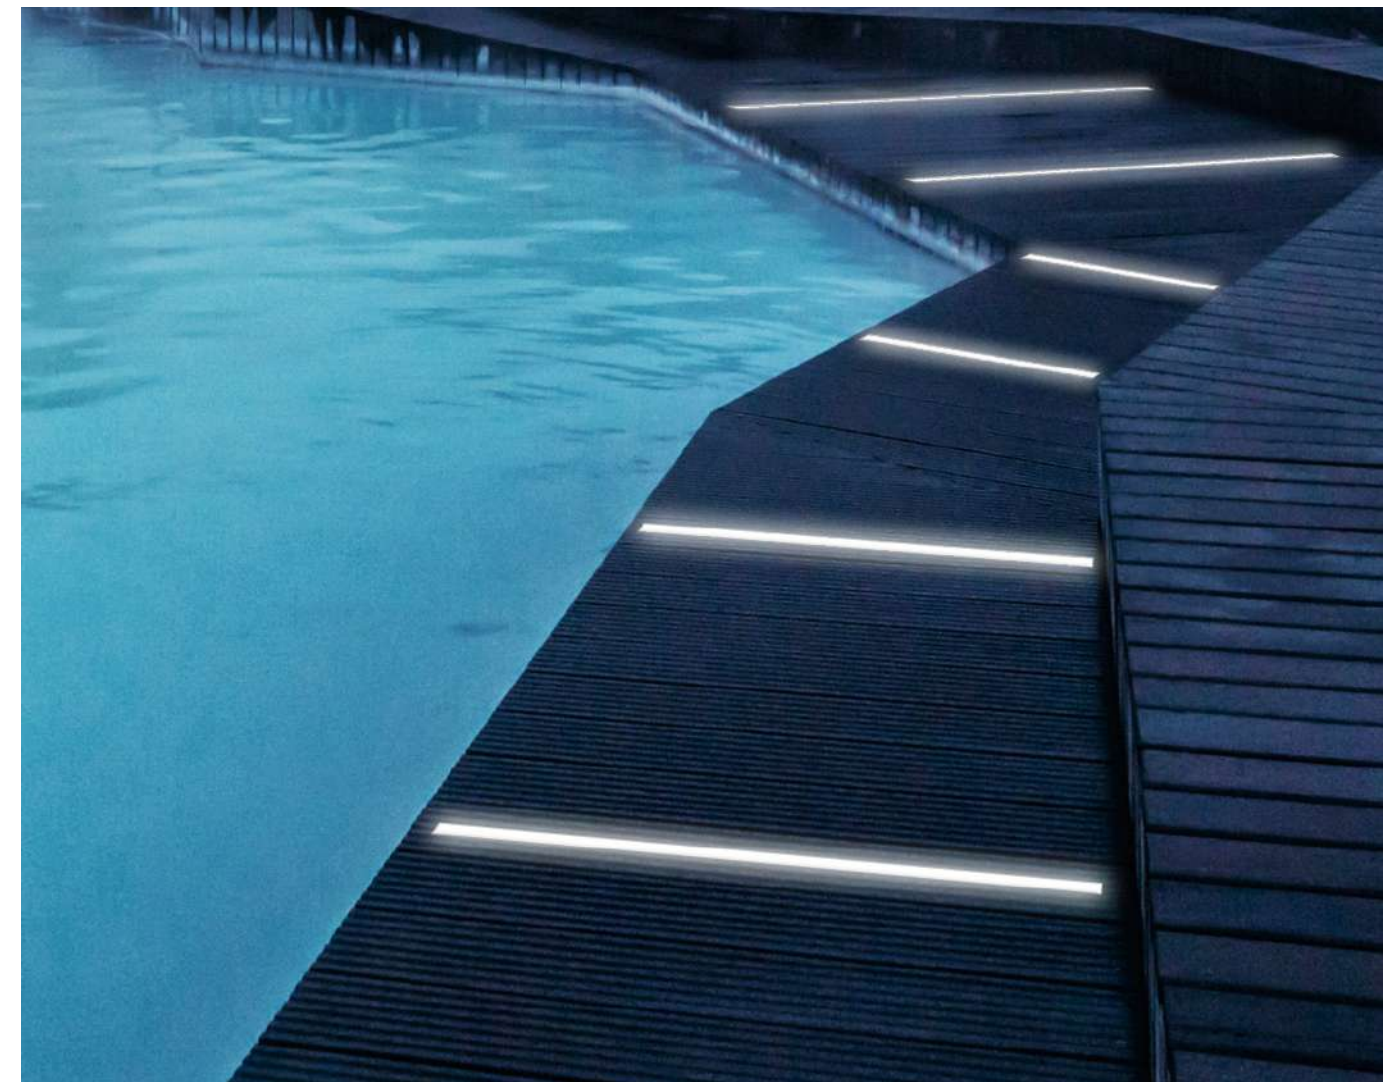


SPOOK

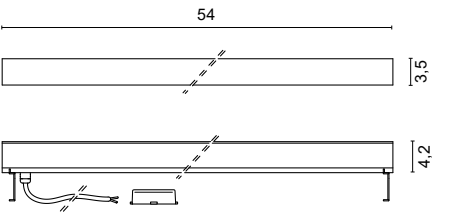

6417	0,80 Kg		
.01	White		
/W	4000K	LED 24V 4,8W	540lm
/WW	3000K	LED 24V 4,8W	510lm



ETL version available upon request
IP67 connectoor included

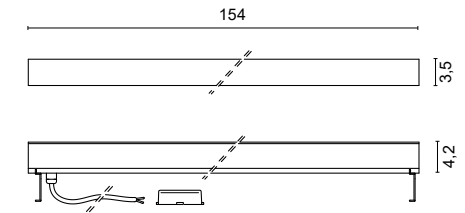

6419	2,30 Kg		
.01	White		
/W	4000K	LED 24V 14,4W	1620lm
/WW	3000K	LED 24V 14,4W	1530lm




ETL version available upon request
IP67 connectoor included

FINISHES CODES



.01 White

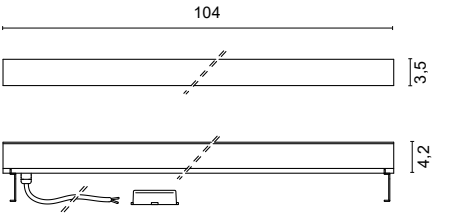

6418	1,60 Kg		
.01	White		
/W	4000K	LED 24V 9,6W	1080lm
/WW	3000K	LED 24V 9,6W	1020lm



ETL version available upon request
IP67 connectoor included

CUSTOM SIZE

Table of available lengths Measures are referred to complete fixtures including closing heads

cm	watt	3000K	lm	4000K	lm
14	1W	A6417.01/14/WW	102	A6417.01/14/W	108
24	1,9W	A6417.01/24/WW	204	A6417.01/24/W	216
34	2,9W	A6417.01/34/WW	306	A6417.01/34/W	324
44	3,8W	A6417.01/44/WW	408	A6417.01/44/W	432
54	4,8W	6417.01/WW	510	6417.01/W	540
64	5,8W	A6417.01/64/WW	612	A6417.01/64/W	648
74	6,7W	A6417.01/74/WW	714	A6417.01/74/W	756
84	7,7W	A6417.01/84/WW	816	A6417.01/84/W	864
94	8,6W	A6417.01/94/WW	918	A6417.01/94/W	972
104	9,6W	6418.01/WW	1020	6418.01/W	1080
114	10,6W	A6417.01/114/WW	1122	A6417.01/114/W	1188
124	11,5W	A6417.01/124/WW	1224	A6417.01/124/W	1296
134	12,5W	A6417.01/134/WW	1326	A6417.01/134/W	1404
144	13,4W	A6417.01/144/WW	1428	A6417.01/144/W	1512
154	14,4W	6419.01/WW	1530	6419.01/W	1620

DRIVERS

ON/OFF

Cod.	0155	0156	0157	0160	0161/100	0162
	24V-13W	24V-20W	24V-75W	24V-60W	24V-100W	24V-150W

DIMMABLE

Cod.	0717/DIM60	0717/DIM60/V	0717/DIM100
	24V-60W PUSH - DALI	24V-60W 1...10V	24V-100W 1...10V - PUSH - DALI

IP67 DRIVER

Cod.	0033/IP	0034/IP	0036/IP
	24V 14,4W	24V 70W	24V 160W

LED EMERGENCY UNIT


0115/EM INVERTER + BATTERY + LED INDICATOR

Only Parallel Connection





CONFIGURATION EXAMPLE

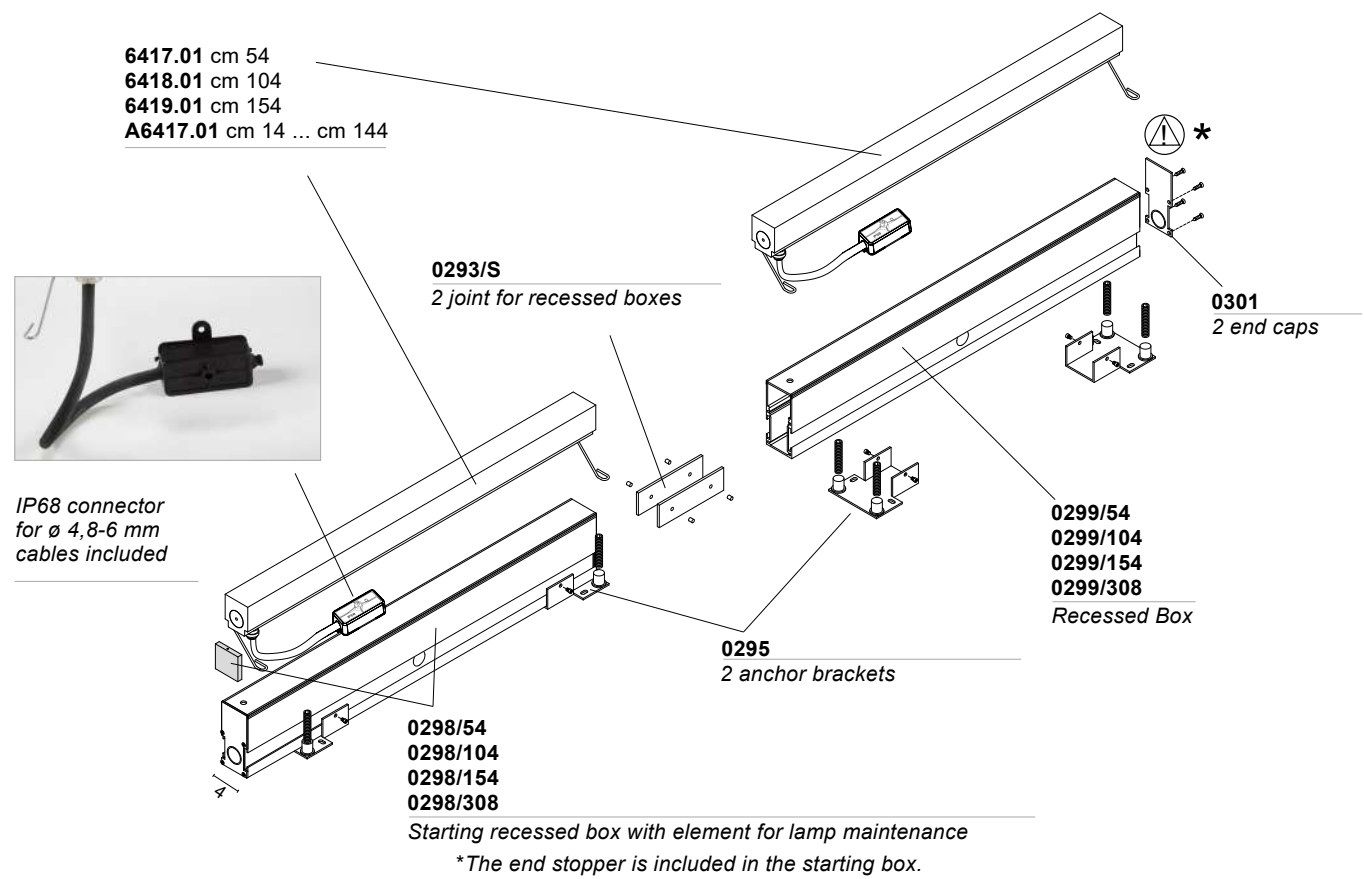

ACCESSORIES



Element
0298

Starting recessed box with caps and element
for lamp maintenance.

/54	55,1 X 4 X 9 cm	0,9 kg
/104	105,1 X 4 X 9 cm	1,7 kg
/154	155,1 X 4 X 9 cm	2,6 kg
/308	309,1 X 4 X 9 cm	5,7 kg



Element
0299

Recessed box
The end stoppers are included in the starting box

/54	55,1 X 4 X 9 cm	0,8 kg
/104	105,1 X 4 X 9 cm	1,6 kg
/154	155,1 X 4 X 9 cm	2,5 kg
/308	309,1 X 4 X 9 cm	5,7 kg



Element
0295

2 anchor brackets for recessed box



Element
0293/S



2 joints for recessed box



Element
0301

2 end caps for recessed box



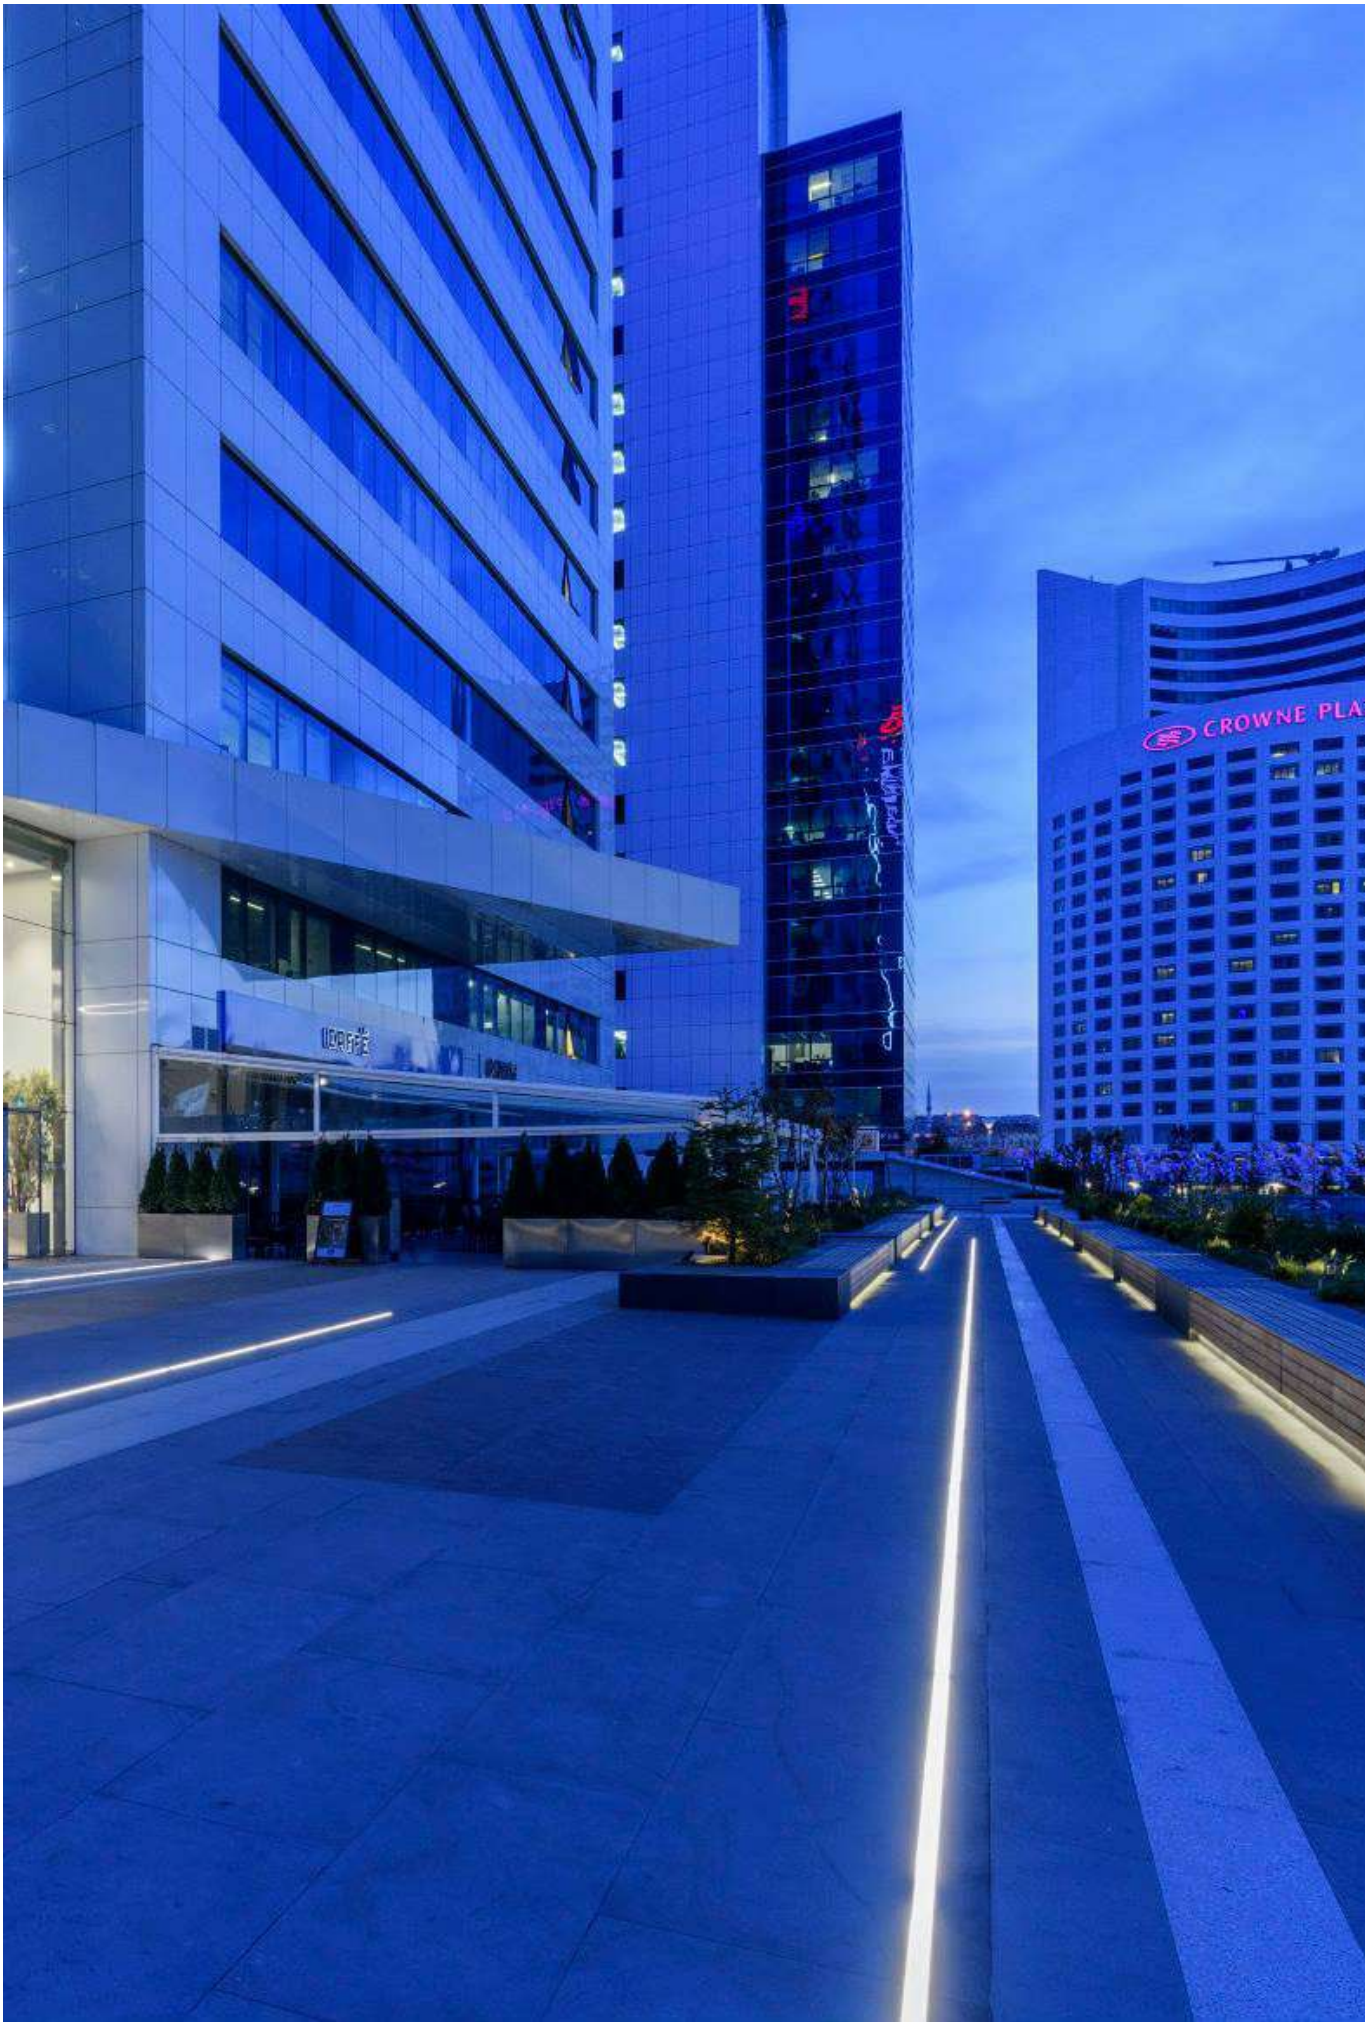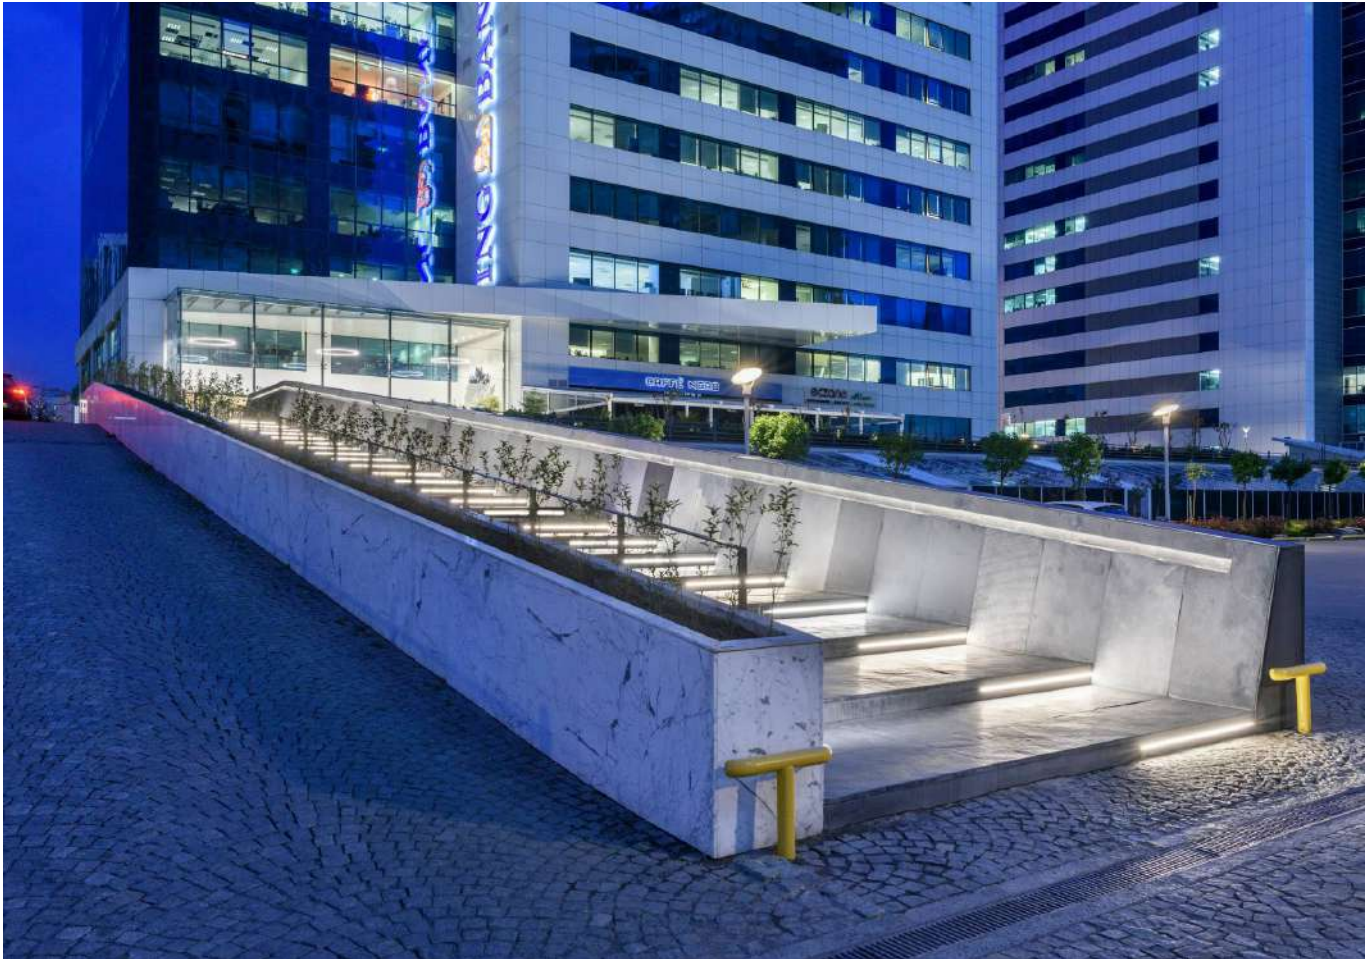










OUTDOOR VISION

Design U.T. EgoLuce





VISION



Series of adjustable outdoor projectors in anodized aluminium (reinforced anodizing for outdoor) with bracket in stainless steel AISI 316L. Supplied with neoprene cable.


To be installed on tile, pavements, walls, ceiling or temporary positioning on soft ground.

Serie di proiettori orientabili per esterni in alluminio anodizzato (anodizzazione rinforzata per esterni) con staffa in acciaio inox AISI 316L. Forniti con cavo in neoprene. Da installare su piastrelle, marciapiedi, pareti, soffitto o da posizionare temporaneamente su terreni morbidi.

Serie von verstellbaren Außenprojektoren aus eloxiertem Aluminium (verstärkte Eloxierung für den Außenbereich) mit Halterung aus rostfreiem Stahl AISI 316L. Geliefert mit Neoprenkabel. Zur Installation auf Fliesen, Gehwegen, Wänden, Decken oder zur vorübergehenden Aufstellung auf weichem Untergrund.



VISION 1


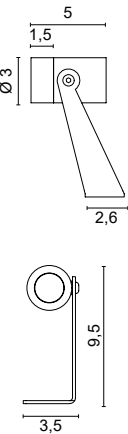


4529		0,20 Kg				
.34	Painted Corten					
.39	Painted Anthracite					
.45	Anodized Aluminium					
/W	4000K	/11	/25	/45	LED 1,5W 500mA	180lm
/WW	3000K	/11	/25	/45	LED 1,5W 500mA	162lm
/XW	2700K	/11	/25	/45	LED 1,5W 500mA	153lm
F III IP66 150 cm CRI >90						

ACCESSORIES

Kit	Connector
0247	0243
Stake for temporary ground installation	IP Connector
	

FINISHES CODES

		
.39 Painted Corten	.39 Painted Anthracite	.45 Anodized Aluminium




DRIVERS

ON/OFF			
Cod.	0125 350mA	0128 350mA	0127 500mA
4529	1-6	1-10	1-6
DIMMABLE			
0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
4529 1-11	1-11	1-21	1-21

Only serial connection

IP67 DRIVER		
Cod.	0031/IP 350mA	0143/IP 500mA
4529	1-12	1-7

VISION 2




4530						0,35 Kg
.34	Painted Corten					
.39	Painted Anthracite					
.45	Anodized Aluminium					
/W	4000K	/18	/40	/60	LED 5,9W 350mA	885lm
/WW	3000K	/18	/40	/60	LED 5,9W 350mA	836lm
/XW	2700K	/18	/40	/60	LED 5,9W 350mA	800lm
  IP66    						

ACCESSORIES

Kit	Connector
0247	0243
Stake for temporary ground installation	IP Connector
	

FINISHES CODES

		
.39 Painted Corten	.39 Painted Anthracite	.45 Anodized Aluminium




DRIVERS

ON/OFF				
Cod.	0125 350mA	0128 350mA	0127 500mA	0147/COB 500mA
4530	1-2	1-3	1-2	1-2
DIMMABLE				
0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI	
4530 1-3	1-3	1-7	1-7	

Only serial connection

IP67 DRIVER		
Cod.	0031/IP 350mA	0143/IP 500mA
4530	1-3	1-2
LED EMERGENCY UNIT		
0115/EM INVERTER + BATTERY + LED INDICATOR		
4530	No	

VISION 3

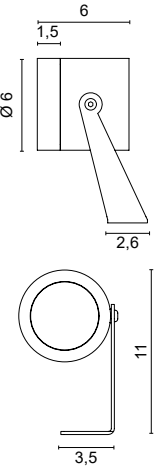

4531		0,50 Kg	
.34	Painted Corten		
.39	Painted Anthracite		
.45	Anodized Aluminium		
/W	4000K /15 /28 /60	LED 8,7W 500mA	1223lm
/WW	3000K /15 /28 /60	LED 8,7W 500mA	1156lm
/XW	2700K /15 /28 /60	LED 8,7W 500mA	1106lm
 IP66 			

ACCESSORIES

Kit	Connector
0247	0243
Stake for temporary ground installation	IP Connector



FINISHES CODES

		
.39 Painted Corten	.39 Painted Anthracite	.45 Anodized Aluminium



DRIVERS

ON/OFF

Cod.	0147/COB 500mA
4531	1-2

DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
4531 1-2	1-2	1-3	1-3

Only serial connection

IP67 DRIVER

Cod.	0143/IP 500mA
4531	1

LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR
4531 1

Only serial connection



OUTDOOR

SPILLO

Design Officinadiarchitettura&design





SPILLO



IP67 floor lamp providing diffused light with an AISI 316L steel structure and a transparent coextruded UV-resistant methacrylate diffuser.

Light is emitted 360° along the entire length of the diffuser.

Accessories for the installation of SPILLO such as the box plate with steel screws, the IP connector for cables with a diameter of less than 7.0 mm, the stakes for temporary ground installation and the base cover must be ordered separately.

Lampada da terra IP67 a luce diffusa con struttura in acciaio AISI 316L e diffusore in metacrilato trasparente coestruso resistente ai raggi UV.

La luce viene emessa a 360° su tutta la lunghezza del diffusore.

Gli accessori per l'installazione di SPILLO, come la piastra di contenimento con viti in acciaio, il connettore IP per cavi di diametro inferiore a 7,0 mm, i picchetti per l'installazione temporanea a terra e il coperchio della base, devono essere ordinati separatamente.


Stehleuchte IP67 für diffuses Licht mit einer Struktur aus Stahl AISI 316L und einem transparenten, koextrudierten Diffusor aus UV-beständigem Methacrylat.

Der Lichtaustritt erfolgt um 360° über die gesamte Länge des Schirms.


Das Zubehör für die Installation von SPILLO, wie z.B. die Kastenplatte mit Stahlschrauben, der IP-Anschluss für Kabel mit einem Durchmesser von weniger als 7,0 mm, die Pflöcke für die vorübergehende Bodeninstallation und die Sockelabdeckung, muss separat bestellt werden.



SPILLO

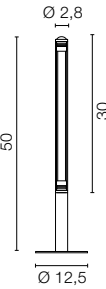

3542		0,60Kg	
.33	Matt Steel INOX AISI 316L		
.34	Painted corten finishing		
/W	4000K	LED 24V 6W	650lm
/WW	3000K	LED 24V 6W	576lm
/XW	2700K	LED 24V 3W	520lm
IP67			

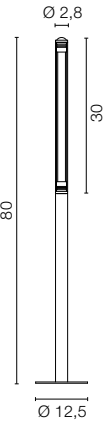

3543		0,90 Kg	
.33	Matt Steel INOX AISI 316L		
.34	Painted corten finishing		
/W	4000K	LED 24V 6W	650lm
/WW	3000K	LED 24V 6W	576lm
/XW	2700K	LED 24V 3W	520lm
IP67			



FINISHES CODES



- .33

Stainless Steel
AISI 316L
- .34

Painted Corten
Finishing



ACCESSORIES

Kit

0246/R

Draining formork
with plate



Box

0243

IP Connector on
cable



Box

0245

Stakes for temporary
installation on field



Box

0252/S.33

Basecover



DRIVERS

ON/OFF				
Cod.	0155	0156	0157	0160
	24V-13W	24V-25W	24V-75W	24V-60W

IP67 DRIVER		
Cod.	0033/IP	0034/IP
	24V 14,4W	24V 70W




INDOOR / OUTDOOR

RACCORDI DI LUCE JOY

Design officinadiarchitettura&design



RACCORDI DI LUCE - JOY



Collection of IP65 direct light system, wall, ceiling, and floor lamps, for both outdoor and indoor use, with structure in 304 stainless steel and aluminum with reinforced anodizing for outdoor use or, in the satin steel finish, in AISI 316L stainless steel.

The system is a new and different way of interpreting light: starting from a single power supply point, the modularity of the various elements allows for the creation of multiple configurations bringing the light wherever it is needed.

Collezione di lampade a luce diretta IP65, a parete, a soffitto e a terra, per esterni e interni, con struttura in acciaio inox 304 e alluminio con anodizzazione rinforzata per esterni o, nella finitura acciaio satinato, in acciaio inox AISI 316L.


Il sistema è un modo nuovo e diverso di interpretare la luce: partendo da un unico punto di alimentazione, la modularità dei vari elementi permette di creare molteplici configurazioni portando la luce ovunque sia necessaria.

Kollektion von IP65-Direktbeleuchtungssystemen, Wand-, Decken- und Stehlampen, sowohl für den Außen- als auch für den Innenbereich, mit Strukturen aus Edelstahl 304 und Aluminium mit verstärkter Eloxierung für den Außenbereich oder, in der Ausführung aus satiniertem Stahl, aus Edelstahl AISI 316L.

Das System ist eine neue und andere Art, Licht zu interpretieren: Ausgehend von einem einzigen Stromanschluss, ermöglicht die Modularität der verschiedenen Elemente die Schaffung von mehreren Konfigurationen, die das Licht dorthin bringen, wo es benötigt wird.



RACCORDI DI LUCE - JOY

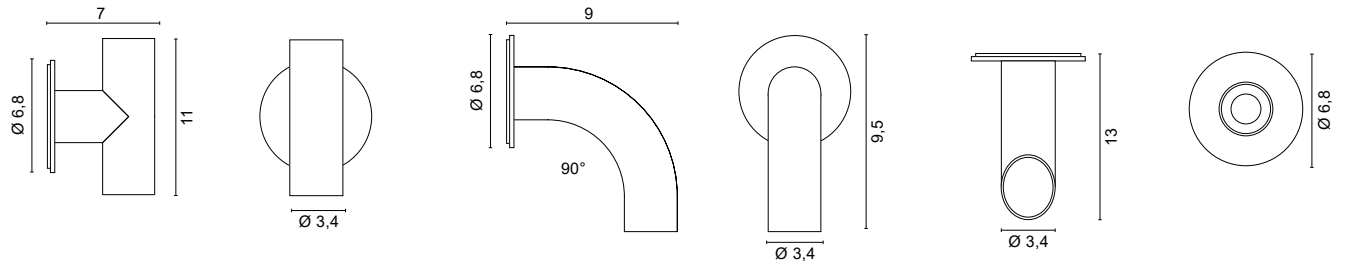


4672					0,31 Kg	4673					0,25 Kg	5690					0,20 Kg				
.01	White					.01	White					.01	White								
.02	Black					.02	Black					.02	Black								
.33	Stainless Steel AISI 316L					.33	Stainless Steel AISI 316L					.33	Stainless Steel AISI 316L								
.34	Painted Corten					.34	Painted Corten					.34	Painted Corten								
/W	4000K	LED 3W	500mA	360lm		/W	4000K	LED 1,5W	500mA	180lm		/W	4000K	LED 1,5W	500mA	180lm					
/WW	3000K	LED 3W	500mA	324lm		/WW	3000K	LED 1,5W	500mA	162lm		/WW	3000K	LED 1,5W	500mA	162lm					
/XW	2700K	LED 3W	500mA	306lm		/XW	2700K	LED 1,5W	500mA	153lm		/XW	2700K	LED 1,5W	500mA	153lm					
F	III	IP65				F	III	IP65				F	III	IP65							




DRIVERS ON/OFF		
Cod. LED	0143/IP 500mA	0127 500mA
4672	1-3	1-3
4673	1-7	1-6
5690	1-7	1-6

Only serial connection


FINISHES CODES

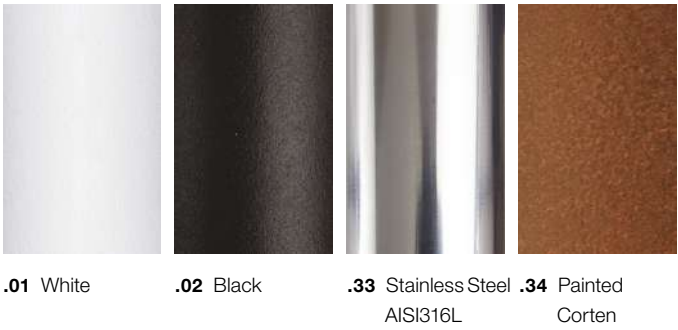

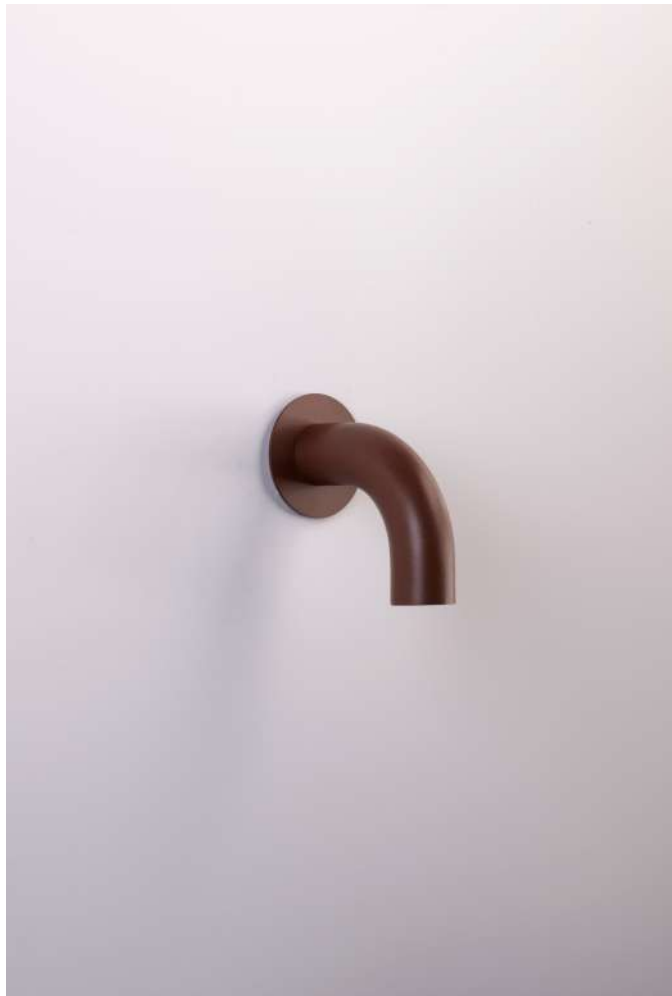



RACCORDI DI LUCE SYSTEM - JOY SYSTEM

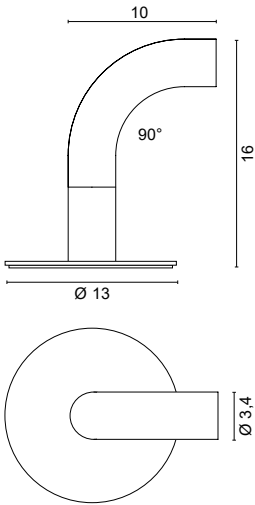

The lamps are supplied without drivers
These are to be ordered separately and placed remotely

3555		0,60 Kg
.33	Stainless Steel AISI 316L	
.34	Painted Corten	■
/W	4000K LED 1,5W 500mA	180lm
/WW	3000K LED 1,5W 500mA	162lm
/XW	2700K LED 1,5W 500mA	153lm
F III IP65 50 cm		

Only Serial Connection

ACCESSORIES

Box
0246/R

Draining formwork
with plate




Connector
0276

IP67 connector
with gel



FINISHES CODES



.33 Stainless Steel AISI316L .34 Painted Corten




DRIVERS

ON/OFF

Cod.	0143/IP 500mA	0127 500mA
3547	1-7	1-6


Only serial connection

RACCORDI DI LUCE SYSTEM - JOY SYSTEM

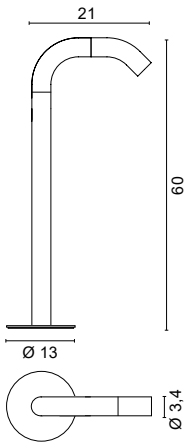

3556		1,50 Kg
.33	Stainless Steel AISI 316L	
.34	Painted Corten	■
/W	4000K LED 1,5W 500mA	180lm
/WW	3000K LED 1,5W 500mA	162lm
/XW	2700K LED 1,5W 500mA	153lm
F III IP65 50 cm CRI >90		

Only Serial Connection

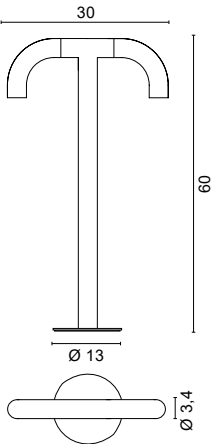

3557		2,00 Kg
.33	Stainless Steel AISI 316L	
.34	Painted Corten	■
/W	4000K LED 3W 500mA	360lm
/WW	3000K LED 3W 500mA	324lm
/XW	2700K LED 3W 500mA	306lm
F III IP65 50 cm CRI >90		

Only Serial Connection



FINISHES CODES



.33 Stainless Steel AISI316L **.34** Painted Corten

ACCESSORIES

Box
0246/R

Draining formwork
with plate



Connector
0276

IP67 Connector



DRIVERS


ON/OFF

Cod.	0143/IP 500mA	0127 500mA
3548	1-3	1-3
3549	1-3	1-3



RACCORDI DI LUCE SYSTEM - JOY SYSTEM

ILLUMINATOR




7516 Illuminatori 0,08 Kg

.45	Anodized aluminium	
/W	4000K LED 1,5W 500mA	180lm
/WW	3000K LED 1,5W 500mA	162lm
/XW	2700K LED 1,5W 500mA	153lm




ELEMENTS




7500 90° expanding bend

.01	White	
.02	Black	
.06	Green	
.33	Stainless Steel AISI 316L	
.34	Painted Corten	




7501 T Joint expanding bend

.01	White	
.02	Black	
.06	Green	
.33	Stainless Steel AISI 316L	
.34	Painted Corten	




7504 45° expanding bend

.01	White	
.02	Black	
.06	Green	
.33	Stainless Steel AISI 316L	
.34	Painted Corten	



7505 Joint with 45° cut

.01	White	
.02	Black	
.06	Green	
.33	Stainless Steel AISI 316L	
.34	Painted Corten	



7508 Linear tube

.01	White	
.02	Black	
.06	Green	
.33	Stainless Steel AISI 316L	
.34	Painted Corten	

/20	20cm
/50	50cm
/100	100cm
/150	150cm



DRIVERS

ON/OFF

Cod.	0143/IP 500mA	0127 500mA
7516	1-7	1-6

Only serial connection


FINISHES CODES



.01 White .02 Black .06 Green .33 Stainless Steel AISI316L .34 Painted Corten


RACCORDI DI LUCE SYSTEM - JOY SYSTEM

ACCESSORIES




7510 Junction element

.02	Black	■
-----	-------	---



7521 Aluminium wall base with cover disk


.01	White	■
.02	Black	■
.06	Green	■
.33	Stainless Steel AISI 316L	■
.34	Painted Corten	■




7522 Base with cover disk

.01	White	■
.02	Black	■
.06	Green	■
.33	Stainless Steel AISI 316L	■
.34	Painted Corten	■


BOX & CONNECTORS




0213 Box + Perforated plaster




0216 Plastic box



0228/R Draining junction box



0246/R Draining formwork with plate




0276 IP67 Connector









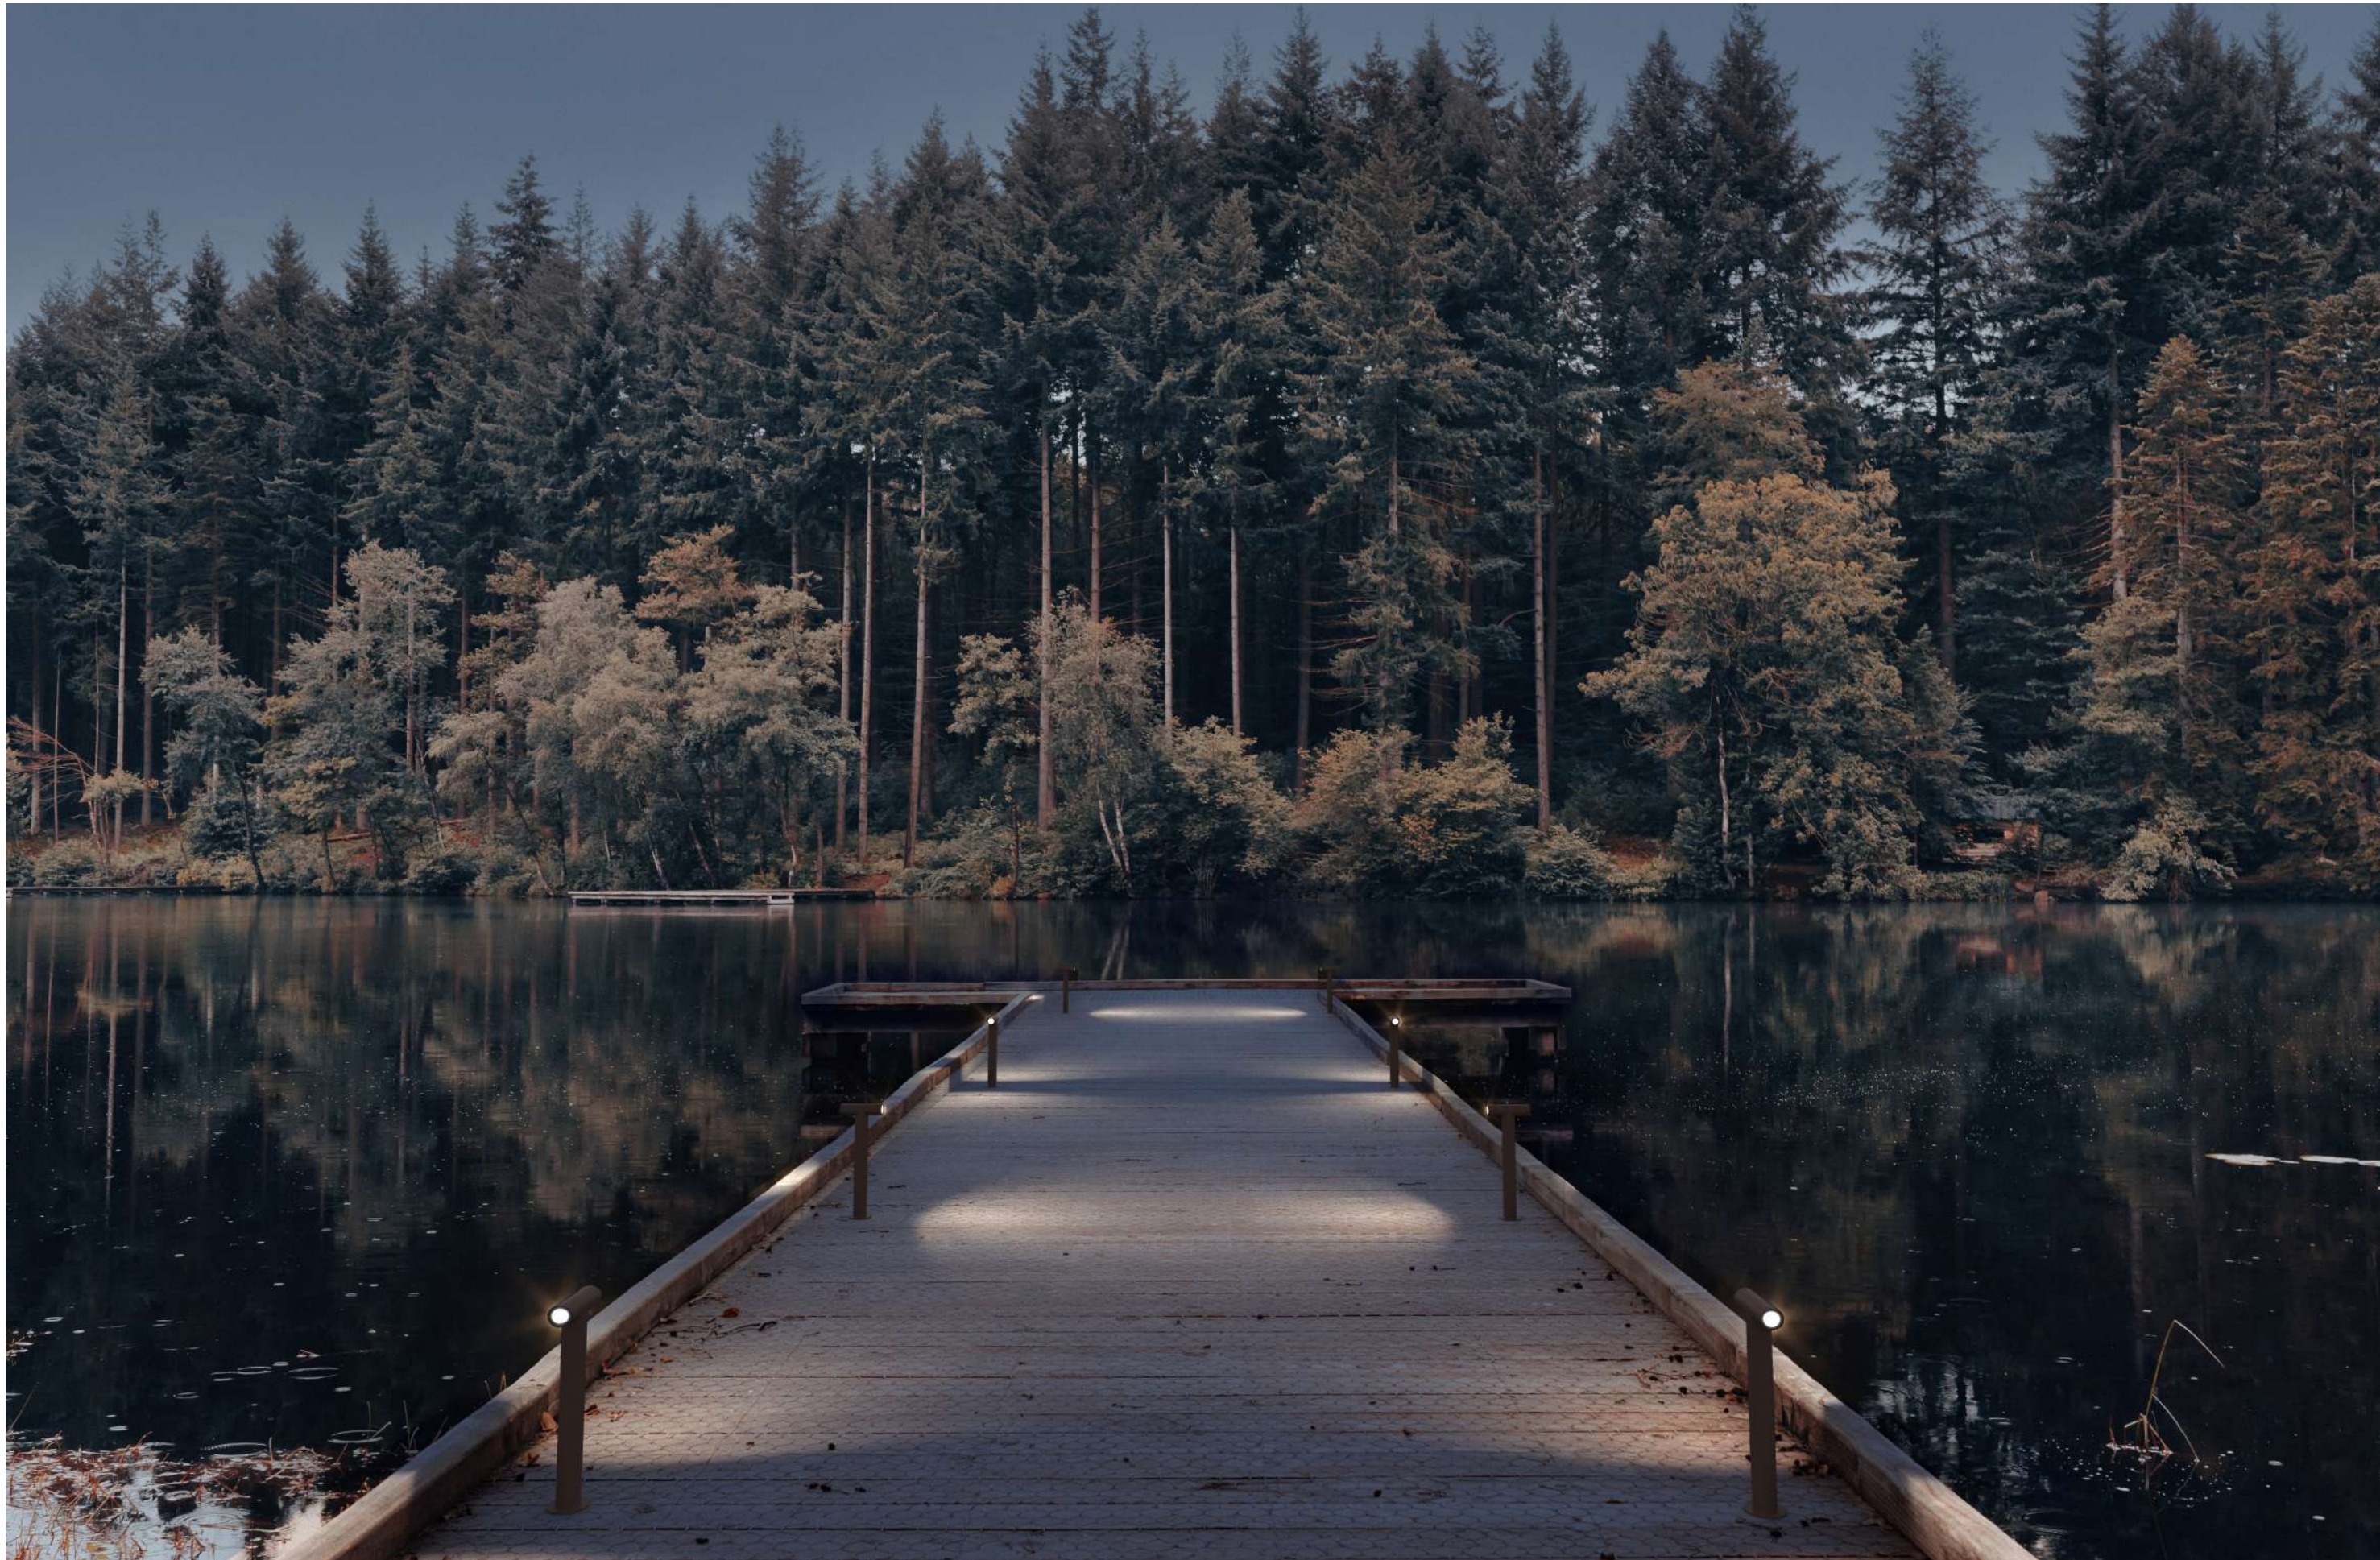

RACCORDI DI LUCE SYSTEM - JOY SYSTEM

EXAMPLES OF MULTIPLE CONFIGURATION

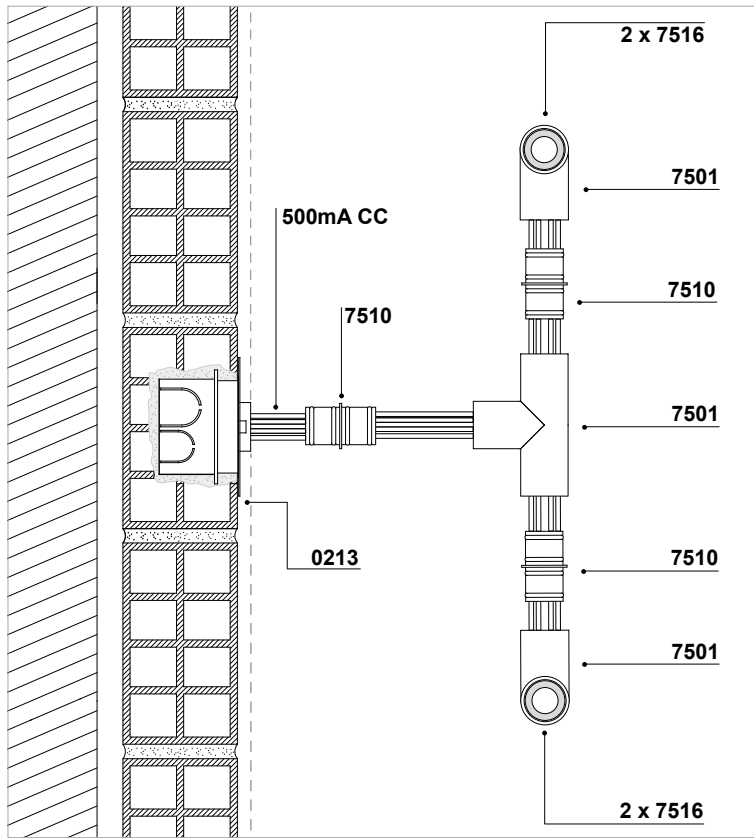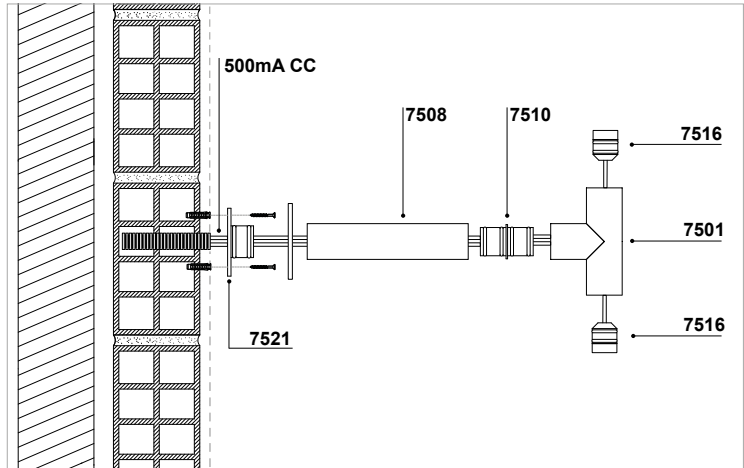





OUTDOOR

TRILLI

Design Matì





TRILLI



IP67 floor lamp providing diffused light with natural copper stem and crystal diffuser. It can be installed with a single or multiple lamp base or with a spike.


Accessories, and the driver to be remotely positioned, are to be ordered separately.

Lampada da terra IP67 a luce diffusa con stelo in rame naturale e diffusore in cristallo. Può essere installata con una base a lampada singola o multipla o con un picchetto. Gli accessori e il driver da posizionare a distanza sono da ordinare separatamente.

Stehleuchte IP67 mit diffusem Licht, Stiel aus natürlichem Kupfer und Kristalldiffusor. Sie kann mit einem einzelnen oder mehreren Lampensockeln oder mit einem Erdspeiß installiert werden. Das Zubehör und das Driver für die entfernte Positionierung sind separat zu bestellen.




TRILLI

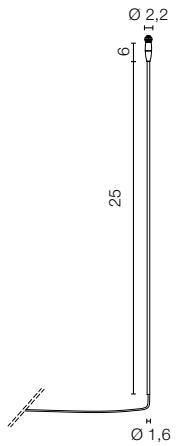


3547 0,15 Kg

.38	Shiny Copper	
/W	4000K LED 1W 350mA	129lm
/WW	3000K LED 1W 350mA	117lm
/XW	2700K LED 1W 350mA	110lm




Moldable and adjustable

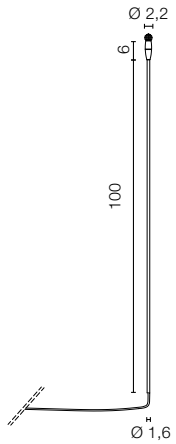


3549 0,40 Kg

.38	Shiny Copper	
/W	4000K LED 1W 350mA	129lm
/WW	3000K LED 1W 350mA	117lm
/XW	2700K LED 1W 350mA	110lm




Moldable and adjustable

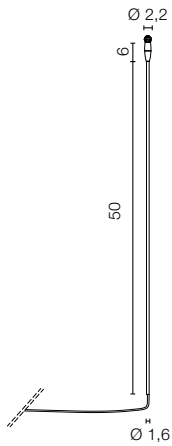

3548 0,25 Kg

.38	Shiny Copper	
/W	4000K LED 1W 350mA	129lm
/WW	3000K LED 1W 350mA	117lm
/XW	2700K LED 1W 350mA	110lm



Moldable and adjustable



FINISHES CODES



.38 Shiny Copper

ACCESSORIES




0259/1 Stake for temporary installation on field



0243 IP connector on cable



0246/R Draining formwork with plate

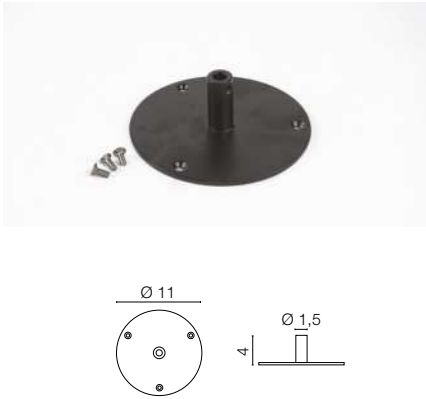

0252/1 Installation base for 1 art. Trilli



0252/2 Installation base for 2 art. Trilli



0252/3 Installation base for 3 art. Trilli



0276 IP67 Connector with gel



DRIVERS

ON/OFF

Cod.	0031/IP 350mA	0125 350m	0128 350mA
3547	1-12	1-6	1-12
3548	1-12	1-6	1-12
3549	1-12	1-6	1-12



DIMMABLE

Cod.	141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0733/DIM PHASE CUT
3547	4-14	5-14	1-21	1-21	1
3548	4-14	5-14	1-21	1-21	1
3549	4-14	5-14	1-21	1-21	1

Only serial connection





EXAMPLES OF MULTIPLE CONFIGURATION

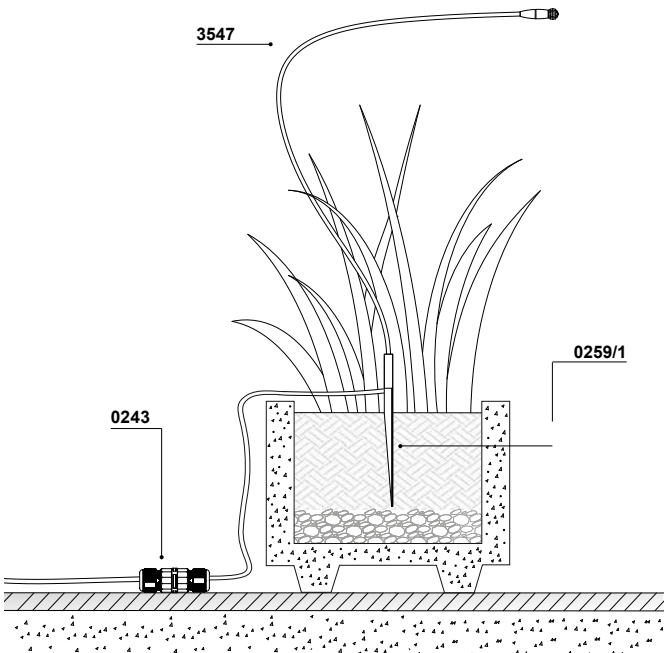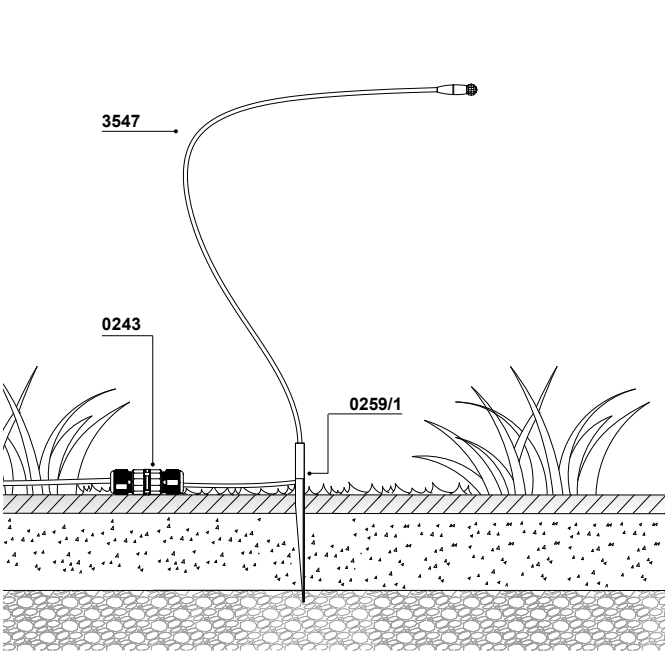


Soft copper pipe, when installed outdoors, will begin a spontaneous reaction with oxygen and water to form its own natural protective layer of copper oxide on its surface. Depending on the composition of the water, the color of this layer varies from turquoise blue to deep green.

The choice of the driver depends on total power consumption.
The drivers, to be ordered separately, must be placed remotely

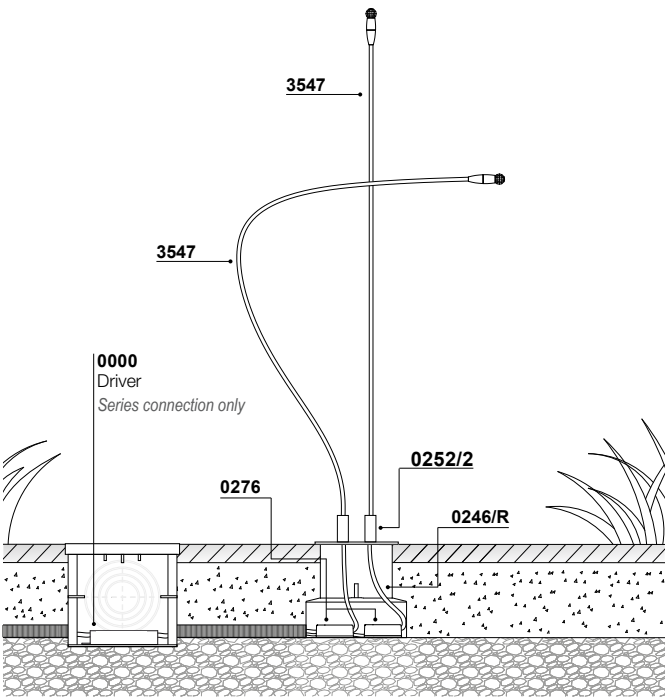

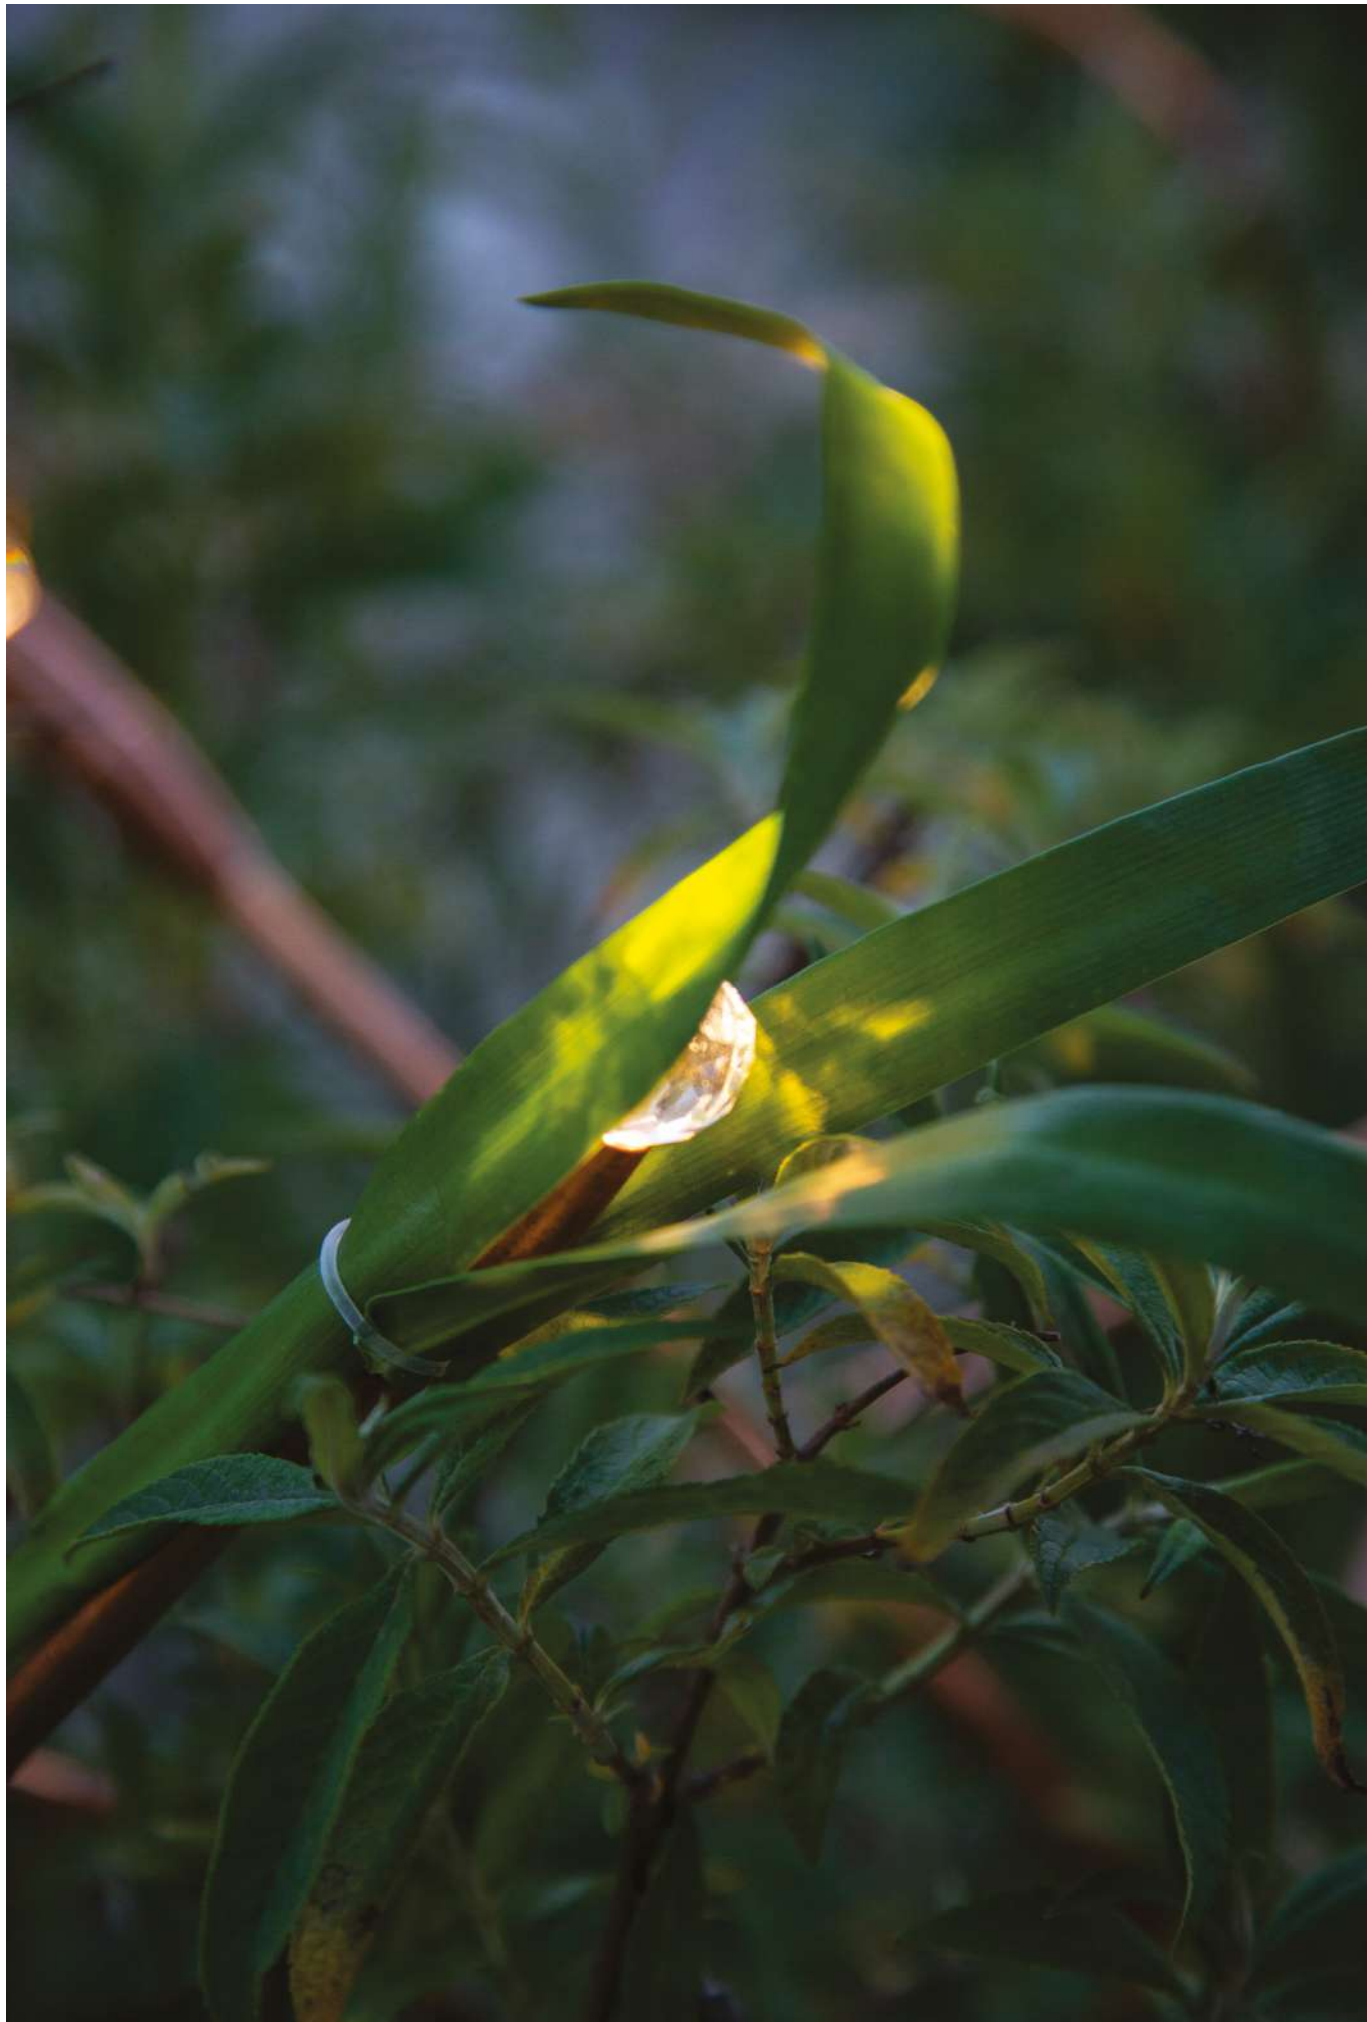

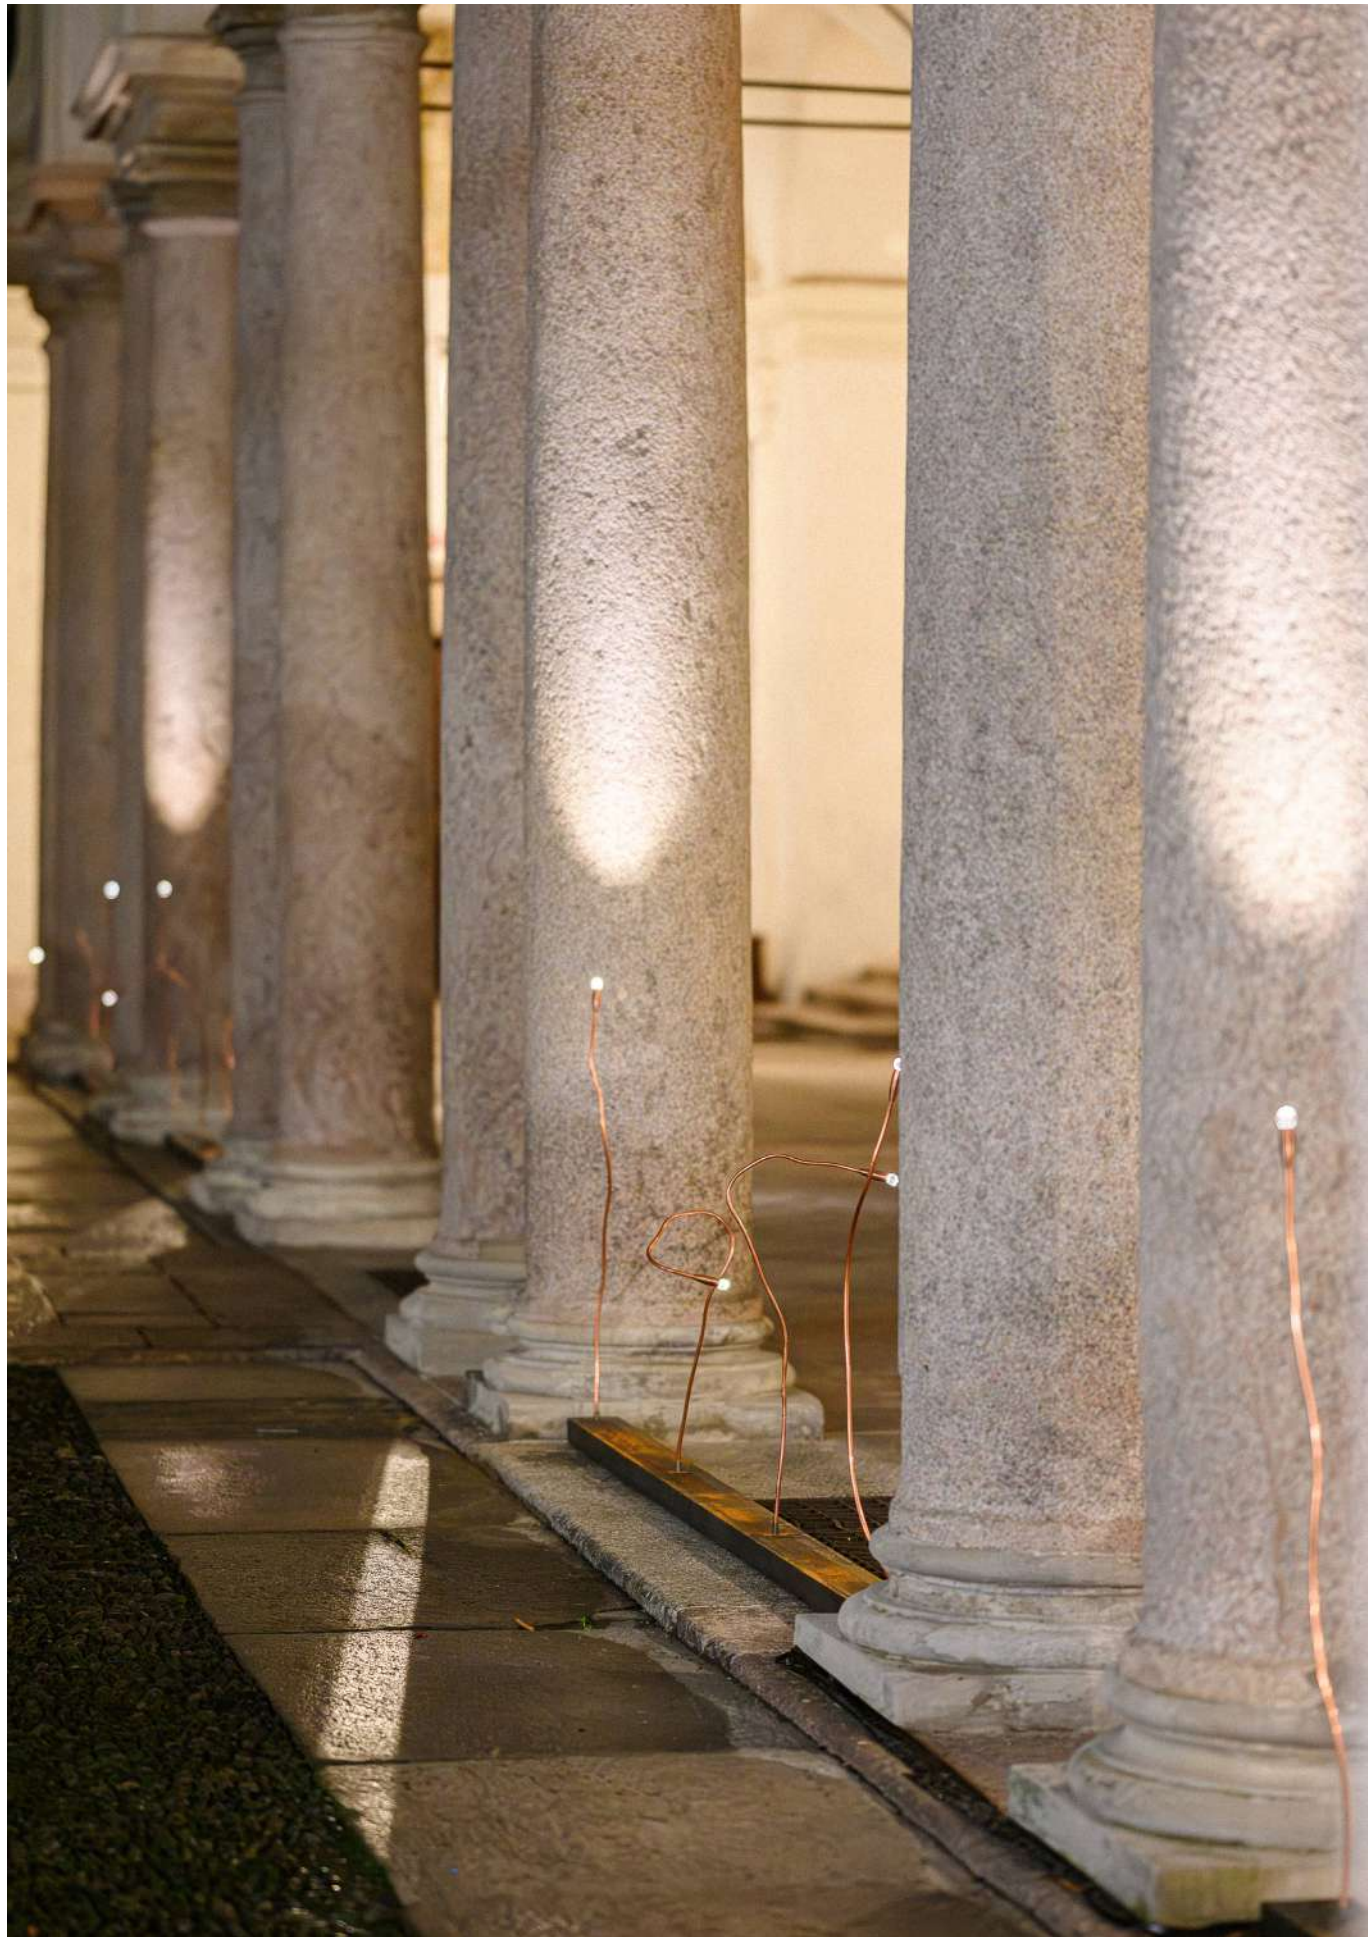



INDOOR

ECLIPSE IP

Design ABS Studio





ECLIPSE IP



Outdoor wall lamp with grazing radial emission light.

The body is made of anodized and painted die-cast aluminum, the screen in opal methacrylate.

The front disc is in painted aluminum. Eclipse IP is an outdoor lamp also designed to furnish with one delicate light that seems to caress the wall. It can be installed alone or in series to enrich a facade, a porch or a any exterior wall.


Lampada da parete per esterni con luce radente a emissione radiale.

Il corpo è in alluminio pressofuso anodizzato e verniciato, lo schermo in metacrilato opalino. Il disco frontale è in alluminio verniciato. Eclipse IP è una lampada da esterno pensata anche per arredare con una luce delicata che sembra accarezzare la parete. Può essere installata da sola o in serie per arricchire una facciata, un portico o una qualsiasi parete esterna.

Außenwandleuchte mit streifendem radialem Emissionslicht.

Der Korpus besteht aus eloxiertem und lackiertem Aluminium-Druckguss, der opale Methacrylatschirm. Die vordere Scheibe ist aus lackiertem Aluminium. Eclipse IP ist eine Außenleuchte, die auch dazu gedacht ist, mit einem zarten Licht zu dekorieren, das die Wand zu streicheln scheint.

Es kann allein oder in Reihe installiert werden, um eine Fassade, eine Veranda oder jede andere Außenwand zu bereichern.

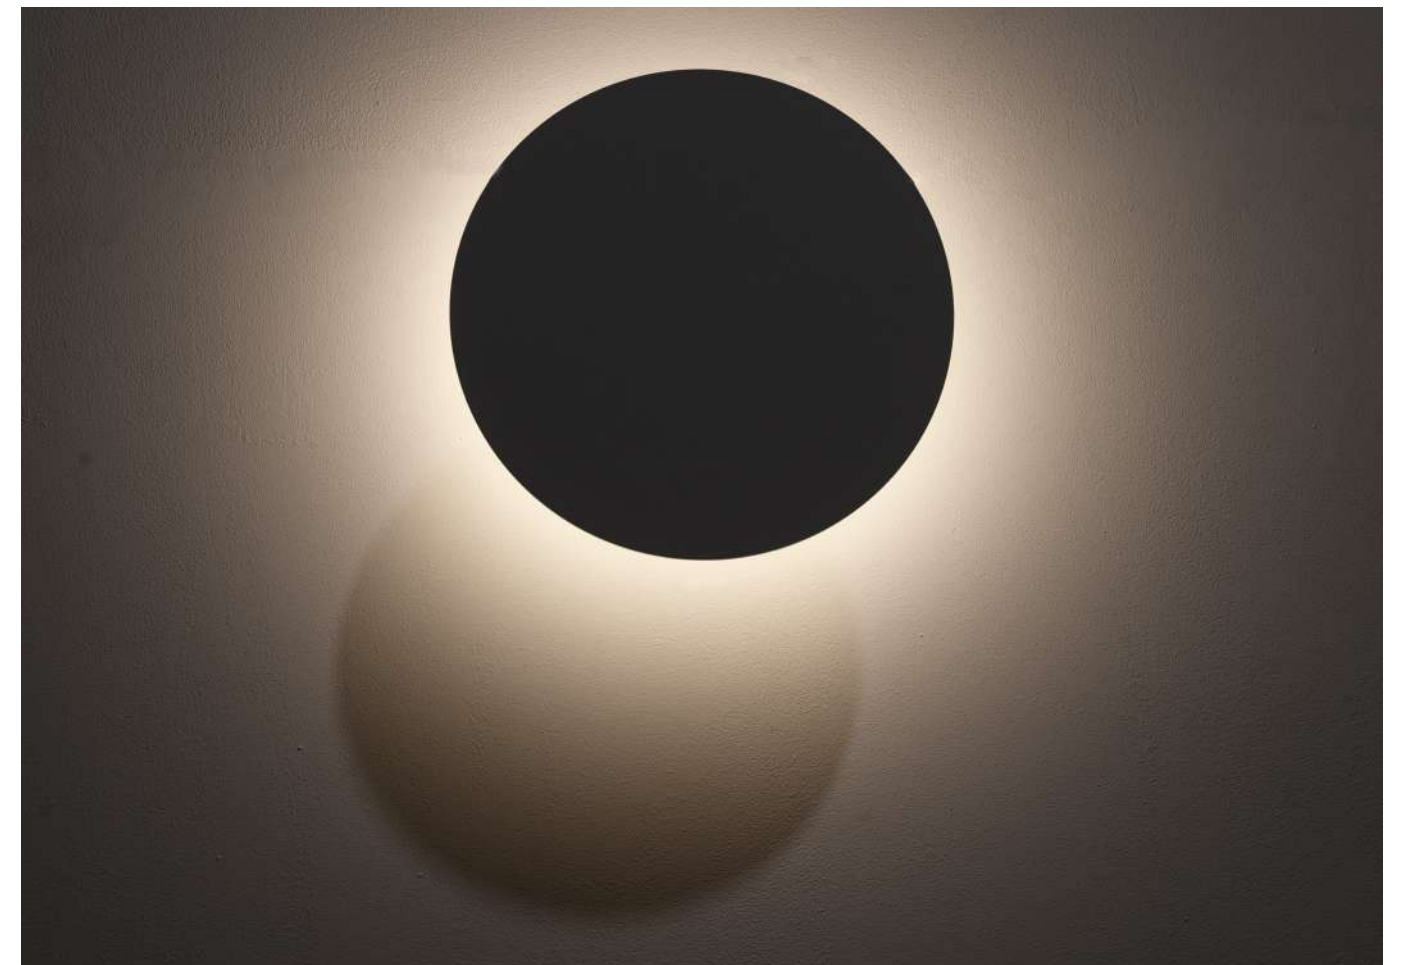

ECLIPSE IP




5

Ø 13,5

Ø 24

4625	1,50 Kg
.01 White	
.34 Painted Corten	
.39 Painted Anthracite	
/WW 3000K LED 8,7W	670lm
IP65	

FINISHES CODES

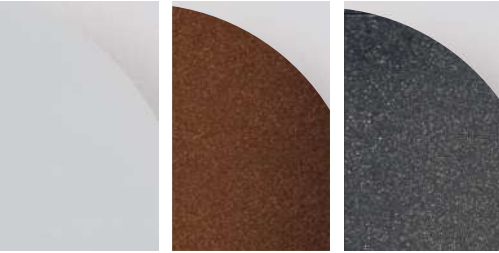

.01 White **.34** Painted corten **.39** Painted Anthracite









INDOOR / OUTDOOR

LARA

Design Serge Cornelissen





LARA




IP65 rechargeable and dimmable table lamp with metal frame, PVC diffuser and USB-C cable for charging included. The battery life is 8 hours at 100% brightness and continuous dimming and the recharge time is 7 hours.

Lampada da tavolo ricaricabile e dimmerabile IP65 con struttura in metallo, diffusore in PVC e cavo USB-C per la ricarica incluso. La durata della batteria è di 8 ore con luminosità al 100% e dimmerazione continua, mentre il tempo di ricarica è di 7 ore.


Wiederaufladbare und dimmbare IP65-Tischleuchte mit Metallrahmen, PVC-Diffusor und USBC- Kabel zum Aufladen im Lieferumfang enthalten. Die Akkulaufzeit beträgt 8 Stunden bei 100 % Helligkeit und stufenlosem Dimmen, die Aufladezeit 7 Stunden.




LARA

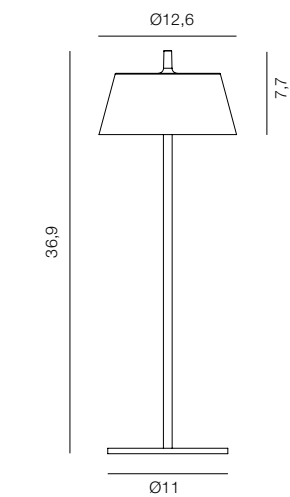

2550	0,65Kg		
.02	Black		
.06	Green		
.34	Rust Brown		
.39	Anthracite		
/WW	3000K	LED 2,2W	117lm
/XW	2700K	LED 2,2W	117lm
F	III	IP65	



FINISHES CODES

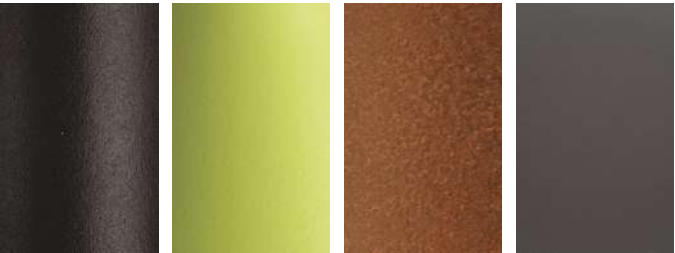

.02 Black .06 Green .34 Rust Brown .39 Anthracite



OUTDOOR

CERCHIO

Design U.T. Egoluce







CERCHIO



IP67 walk-over recessed direct/diffused spotlight with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable	<i>Faretto da incasso a luce diretta/diffusa IP67 con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm.</i>	<i>Begehbare Direkt-/Diffusor-Einbaustrahler IP67 mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel</i>
---	--	---



CERCHIO

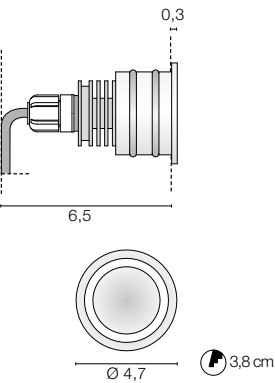


6389		0,20 Kg	
.33	Stainless Steel AISI 316L	III	
/B	LED BLU	max 1W 350mA	
/W	4000K	max 1,5W 500mA	221lm
/WW	3000K	max 1,5W 500mA	210lm
/XW	2700K	max 1,5W 500mA	199lm
F III IP67 50 cm 1000 kg T< 40°C			




.33/B



.33/W



.33/WW



.33/XW

FINISHES CODES



.01 White



ACCESSORIES

Kit
0250

Kit draining junction
+ IP connector



Box
0217

Plastic box



DRIVERS

ON/OFF

Cod.	0125 350mA	0128 350mA	0127 500mA
6389	1-6	1-10	1-6

DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
6389 1-11	1-11	1-21	1-21

Only serial connection

IP67 DRIVER

Cod.	0033/IP 350mA	0143/IP 500mA
6389	1-10	1-7



0,30 Kg



 IP67
 






.01 White

Kit

Draining junction



Box

Plastic box



DRIVER RGB

120W

IN 230V - OUT 3 X 24V

CONVERTER RGB

IN 24V - OUT 3 X 250mA 1-5 Cerchio RGB

DRIVER RGB CASAMBI

120W

IN 230V - OUT 3 X 24V

SENSOR & CABLE RGB

IR Sensor

0165
IR Remote controller

Sync Cable

OUTDOOR

KROSS

Design U.T. EgoIuce







KROSS



IP67 walkable downlight with radial light with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable.

Downlight calpestabile IP67 a luce radiale con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm.

Begehbares IP67-Downlight mit Radiallicht mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel.



3 cm



6361	0,10 Kg		
.33	Stainless Steel AISI 316L		
/B	LED BLU	1W 350mA	
/W	4000K	max 1,5W 500mA	221lm
/WW	3000K	max 1,5W 500mA	210lm
/XW	2700K	max 1,5W 500mA	199lm




ETL version available upon request



.33/W



.33/WW



.33/B

FINISHES CODES



.33 Stainless Steel
AISI 316L



ACCESSORIES

Kit

0220

Kit draining junction
+ IP connector



Box

0216

Plastic box



Spring for
plasterboard included



3,2 cm

DRIVERS

ON/OFF

Cod.	0125 350mA	0128 350mA	0127 500mA
6361	1-6	1-10	1-6

DIMMABLE


0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
6361 1-11	1-11	1-21	1-21

Only serial connection

IP67 DRIVER

Cod.	0031/IP 350mA	0143/IP 500mA
6361	1-12	1-7


KROSS MINI



6735 0,07 Kg

.33 Stainless Steel AISI 316L

/W	4000K	1W 350mA	158lm
/WW	3000K	1W 350mA	150lm
/XW	2700K	1W 350mA	143lm



ACCESSORIES

Box
0215
Plastic box



Spring for
plasterboard included



2,2 cm

FINISHES CODES



.33 Stainless Steel
AISI 316L



DRIVERS

ON/OFF

Cod.	0125 350mA	0128 350mA
6735	1-6	1-10

DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
6735 1-12	1-12	1-21	1-21

Only serial connection

IP67 DRIVER

Cod.	0031/IP 350mA
6735	1-12



OUTDOOR

VISTA

Design U.T. EgoIuce





VISTA





IP67 walkable downlight with radial light with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable.

Downlight calpestabile IP67 a luce radiale con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm.

Begehbares IP67-Downlight mit Radiallicht mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel.

VISTA



6362				0,10 Kg
.33	Stainless Steel AISI 316L			
/W	4000K	max 1,5W 500mA	221lm	
/WW	3000K	max 1,5W 500mA	210lm	
/XW	2700K	max 1,5W 500mA	199lm	
		IP67		


ETL version available upon request



FINISHES CODES



.33 Stainless Steel
AISI 316L

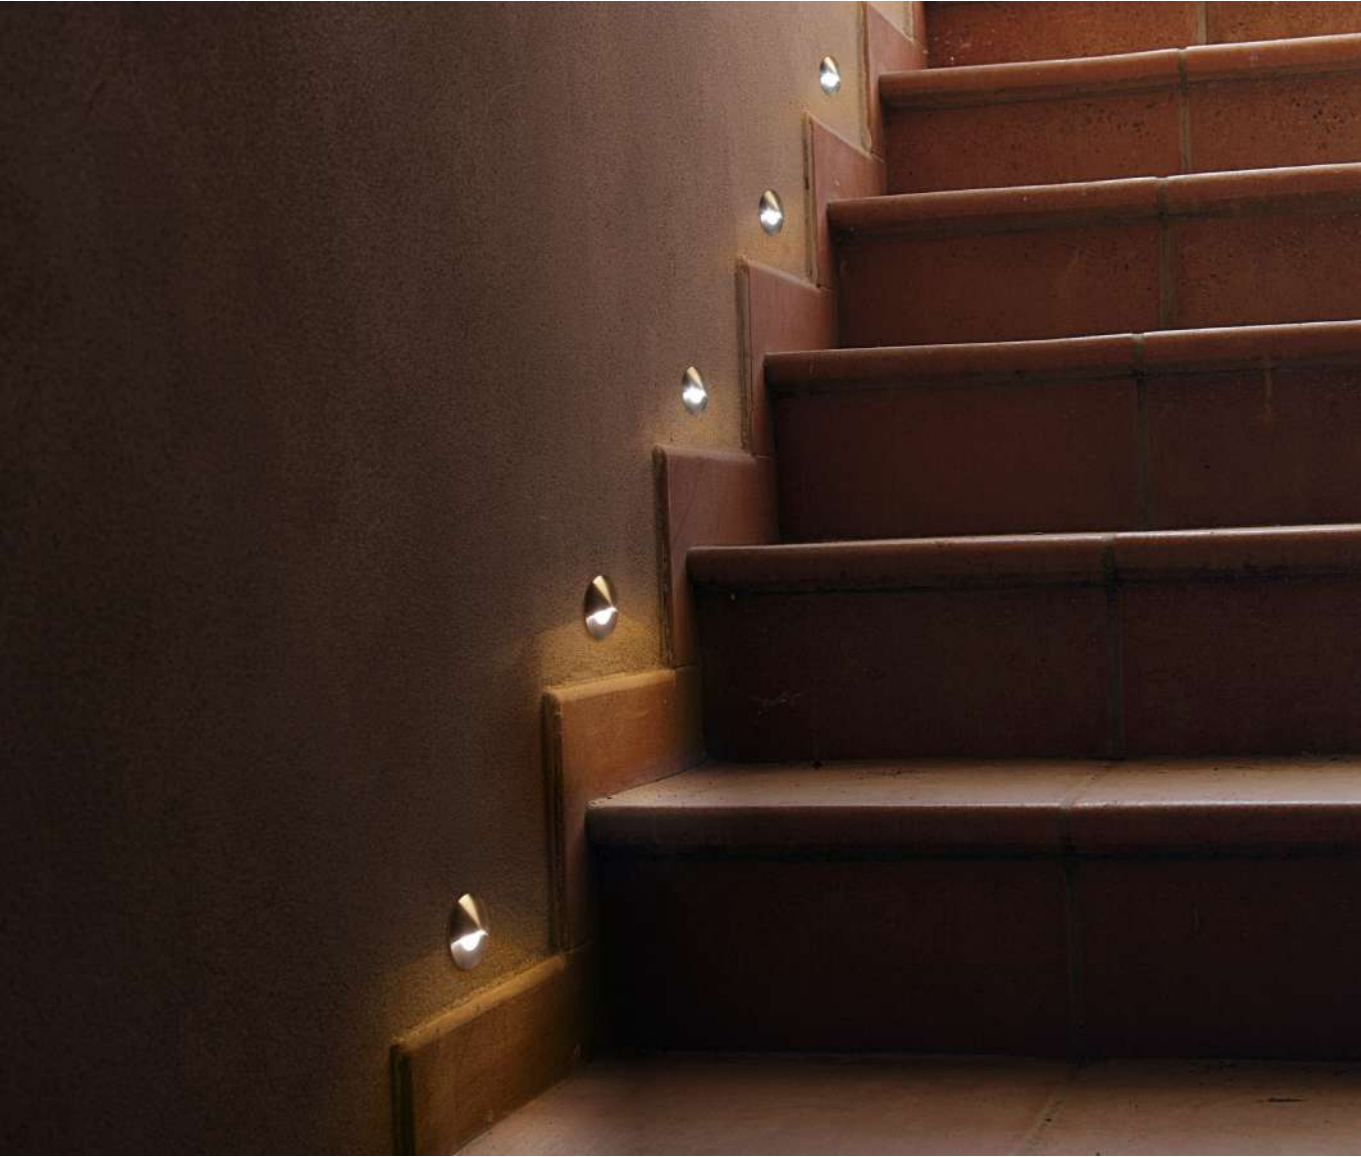

ACCESSORIES


Kit 0220 Kit draining junction + IP connector		Box 0216 Plastic box		Spring for plasterboard included	

DRIVERS

ON/OFF				IP67 DRIVER		
Cod.	0125 350mA	0128 350mA	0127 500mA	Cod.	0031/IP 350mA	0143/IP 500mA
6362	1-6	1-10	1-6	6362	1-12	1-7
DIMMABLE						
0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI			
6362	1-11	1-11	1-21	1-21		

Only serial connection

VISTA MINI



6374		0,07 Kg	
.33	Stainless Steel AISI 316L		III
/W	4000K	1W 350mA	158lm
/WW	3000K	1W 350mA	150lm
/XW	2700K	1W 350mA	143lm
F III IP67 30 cm 500 kg T< 40°C R			



FINISHES CODES



.33 Stainless Steel
AISI 316L



ACCESSORIES

Box
0215
Plastic box



Spring for
plasterboard included



2,2 cm

DRIVERS

ON/OFF			
Cod.	0125 350mA	0128 350mA	
6374	1-6	1-10	
DIMMABLE			
0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
6374	1-12	1-21	1-21

Only serial connection

IP67 DRIVER	
Cod.	0031/IP 350mA
6374	1-12



OUTDOOR

DRIVE

Design U.T. EgoLuce





DRIVE




IP67 driveway recessed diffused spotlight with AISI 316L stainless steel flange, screen-printed opal glass diffuser, aluminium heat sink, frosted glass screen and neoprene cable.

Faretto diffuso da incasso calpestabile IP67 con flangia in acciaio inox AISI 316L, diffusore in vetro opalino serigrafato, dissipatore di calore in alluminio, schermo in vetro satinato e cavo in neoprene.

Diffuser Einbaustrahler IP67 mit Flansch aus Edelstahl AISI 316L, Diffusor aus Opalglas mit Siebdruck, Kühlkörper aus Aluminium, Mattglasscheibe und Neoprenkabel

DRIVE

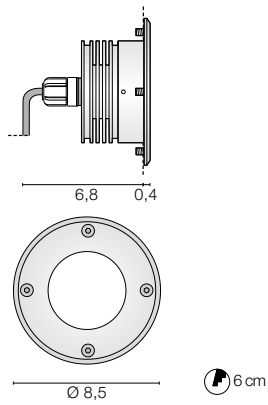

6729				0,40 Kg
.33	Stainless Steel AISI 316L			III
/W	4000K	LED 4W 24V	658lm	
/WW	3000K	LED 4W 24V	608lm	
/XW	2700K	LED 4W 24V	562lm	



Driveover recessed spot 2000Kg

ACCESSORIES

Kit

0229

Kit draining junction
+ IP connector

FINISHES CODES



.33 Stainless Steel
AISI 316L



DRIVERS

ON/OFF		
Cod.	0155 24V - 13W	0156 24V - 25W
6729	1-2	1-4
DIMMABLE		
0717/DIM60/V PUSH - 1...10V	0717/DIM60 DALI - PUSH	
6729	1-10	1-10

Only Parallel connection

IP67 DRIVER		
Cod.	0033/IP 24V 14,4W	0037/IP 24V 60W
6729	1-2	1-10



OUTDOOR

TRIS

Design U.T. EgoLuce





TRIS




IP67 walk-over recessed outdoor spotlight with AISI 316L stainless steel flange and aluminium heat sink, fitted with clear protective glass and 30 cm neoprene cable.

Faretto da incasso per esterni IP67 con flangia in acciaio inox AISI 316L e dissipatore di calore in alluminio, dotato di vetro di protezione trasparente e cavo in neoprene da 30 cm.

Begehbare IP67-Einbaustrahler für den Außenbereich mit Flansch aus Edelstahl AISI 316L und Kühlkörper aus Aluminium, ausgestattet mit klarem Schutzglas und 30 cm Neoprenkabel.

TRIS

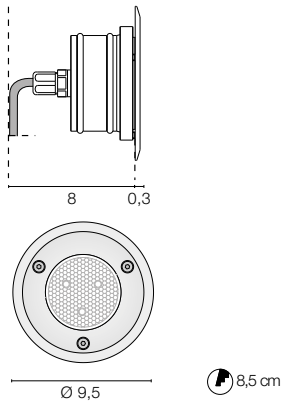

6371				0,40 Kg
.33	Stainless Steel AISI 316L			III
/W	4000K	max 3x1,5W 500mA	663lm	
/WW	3000K	max 3x1,5W 500mA	630lm	
/XW	2700K	max 3x1,5W 500mA	597lm	
F III IP67 30 cm 1000 kg Tc 50°C ✗ R				

ETL version available upon request



FINISHES CODES



.33 Stainless Steel
AISI 316L

ACCESSORIES

Kit
0231

Kit draining junction
+ IP connector



Box
0235

Wall plastic box



Connector
0243

IP connector



Kit
0233

Spring for plaster-board



8,5 cm

DRIVERS

ON/OFF			
Cod.	0125 350mA	0128 350mA	0127 500mA
6371	1-2	1-3	1-2
DIMMABLE			
0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
6371	1-3	1-3	1-7

Only serial connection

IP67 DRIVER		
Cod.	0031/IP 350mA	0143/IP 500mA
6371	1-3	1-2

OUTDOOR
SOFT

Design U.T. EgoLucce





SOFT




IP67 walk-over downlight with AISI 316L stainless steel round flange, aluminium heat sink, frosted safety glass and 30 cm neoprene cable.

Faretto calpestabile IP67 con flangia circolare in acciaio inox AISI 316L, dissipatore di calore in alluminio, vetro di sicurezza satinato e cavo in neoprene da 30 cm.

Begehbares Downlight IP67 mit rundem Flansch aus Edelstahl AISI 316L, Kühlkörper aus Aluminium, mattiertem Sicherheitsglas und 30 cm Neoprenkabel.

SOFT

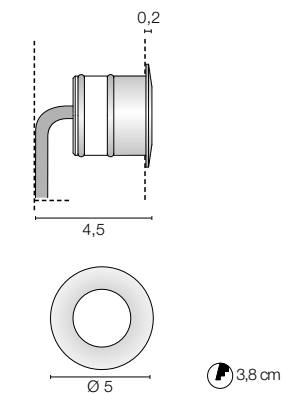

6388		0,11 Kg
.33	Stainless Steel AISI 316L	
/W	4000K	LED 1,5W 12V
/WW	3000K	LED 1,5W 12V
		IP67

ACCESSORIES

Kit
0250

Kit draining junction
+ IP connector

Box
0217

Plastic box

FINISHES CODES



.33 Stainless Steel
AISI 316L



DRIVERS

ON/OFF		
Cod.	0158	
	12V - 25W	
6388	1-15	
DIMMABLE		
0129	0129/DALI	
Multi power dimmable driver	Multi power DALI dimmable driver	
6388	1-6	1-6

Only Parallel connection

IP67 DRIVER		
Cod.	0036/IP	
	12V 14,4W	
6388	1-8	



OUTDOOR

STEP MINI

Design U.T. EgoLuce





STEP MINI




Outdoor recessed spotlight (IP 65) with asymmetrical light in anodised or white painted aluminium with reinforced outdoor finish and neoprene cable.

Faretto da incasso per esterni (IP 65) a luce asimmetrica in alluminio anodizzato o verniciato bianco con finitura esterna rinforzata e cavo in neoprene.


Einbaustrahler für den Außenbereich (IP 65) mit asymmetrischem Licht aus eloxiertem oder weiß lackiertem Aluminium mit verstärkter Außenlackierung und Neoprenkabel.



STEP MINI




6738				0,08 Kg	
.01	White				
.45	Anodized Aluminium				
/W	4000K	1W 350mA	158lm		
/WW	3000K	1W 350mA	150lm		
/XW	2700K	1W 350mA	143lm		
		IP65			



6739				0,08 Kg	
.01	White				
.45	Anodized Aluminium				
/W	4000K	1W 350mA	158lm		
/WW	3000K	1W 350mA	150lm		
/XW	2700K	1W 350mA	143lm		
		IP65			

FINISHES CODES



.01 White **.45** Anodized Aluminium



ACCESSORIES

Kit

0214

Box + Plaster



Box

0217

Plastic box



DRIVERS

ON/OFF

Cod.	0125 350mA	0128 350mA
6738	1-6	1-10
6739	1-6	1-10

DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
6738	1-12	1-12	1-21
6739	1-12	1-12	1-21

Only serial connection

IP67 DRIVER

Cod.	0031/IP 350mA
6738	1-12
6739	1-12

OUTDOOR

STAR IP

Design U.T. EgoLuce





STAR



RGB, IP65, recessed mini trim spotlight with integrated high performance COB LED source, aluminum body, round frame, glass screen and accessory supplied for installation on plasterboard ceilings.

On request, round and square formworks are available for installation in plasterboard for a total disappearance of the spotlight.

The small size and the degree of protection make it ideal for lighting small rooms, outdoor niches, bathrooms and shower boxes.

Faretto mini trim RGB, IP65 da incasso con sorgente COB LED integrata ad elevate prestazioni, corpo in alluminio, cornice tonda, schermo in vetro e accessorio in dotazione per installazioni su soffitti in cartongesso.

Su richiesta sono disponibili casseforme tonde e quadrate per l'installazione in cartongesso per una scomparsa totale del faretto.

Le ridotte dimensioni e il grado di protezione lo rendono ideale illuminare piccoli ambienti, nicchie in esterno, bagni e box doccia.


RGB, IP65, Mini-Einbaustrahler mit integrierter COB-Hochleistungs-LED-Quelle, Aluminiumgehäuse, rundem Rahmen, Glasscheibe und mitgeliefertem Zubehör für die Installation an Gipskartondecken.

Auf Anfrage sind runde und quadratische Schalungen für den Einbau in Gipskartonplatten erhältlich, um den Strahler vollständig verschwinden zu lassen.

Die geringe Größe und die Schutzart machen ihn ideal für die Beleuchtung kleiner Räume, Nischen im Freien, Bäder und Duschkabinen.



STAR IP - STAR RGB

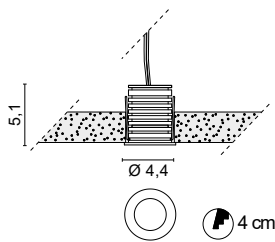

6692

0,12 Kg

.01	White	
.02	Black	
.31	Chromed	

/W	4000K	LED 17V 2,4W 150mA	398lm
/WW	3000K	LED 17V 2,4W 150mA	376lm
/XW	2700K	LED 17V 2,4W 150mA	360lm

F


III

IP54









6693		0,14 Kg
.01	White	
.02	Black	
.31	Chromed	
LED 3 x 250mA		
IP65		

ACCESSORIES

Trimless recessed installation in plasterboard
0206

- .01 White
- .01 Black

Round wall box for installation in plasterboard
false ceiling

Trimless recessed installation in plasterboard
0207

- .01 White
- .01 Black

Square wall box for installation in plasterboard
false ceiling

Brick installation
0225

Recessed box for brick mounting


Installation in concrete
0223

Recessed box for concrete mounting

Brick installation
0224/C

Perforated plaster kit

FINISHES CODES

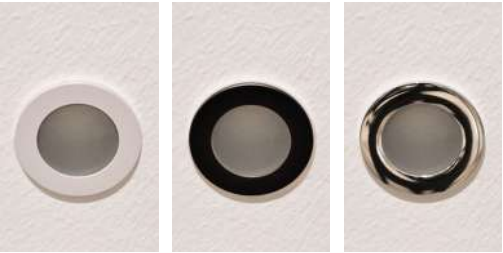

.01 White .02 Black .31 Chromed



Project Studio Keyart Milano

DRIVERS

ON/OFF

Cod.	0151/150 150mA
6692	1-2

Only serial connection

DRIVER RGB

0164 120W	0167 22W
IN 230V - OUT 3 X 24V	

CONVERTER RGB CASAMBI

0168 IN 24V - OUT 3 X 250mA 1-5 Star RGB

DRIVER RGB CASAMBI

0164/CASA 120W
IN 230V - OUT 3 X 24V

SENSOR & CABLE RGB

0163 IR Sensor

0165 IR Remote controller

0166 Sync Cable

INDOOR / OUTDOOR


ZEPPELIN

Design U.T. EgoIuce





ZEPPELIN




Series of walkable downlights (IP 67) with AISI 316L stainless steel flange, aluminum heat sink and 30cm neoprene cable. Available in round and square versions. Formwork or plasterboard mounting with special accessory.

Serie di downlight calpestabili (IP 67) con flangia in acciaio inox AISI 316L, dissipatore di calore in alluminio e cavo in neoprene da 30 cm. Disponibile nelle versioni tonda e quadrata. Montaggio su cassaforma o cartongesso con accessorio speciale.

Serie von begehbaren Downlights (IP 67) mit Flansch aus rostfreiem Stahl AISI 316L, Kühlkörper aus Aluminium und 30cm Neoprenkabel. Erhältlich in runder und quadratischer Ausführung. Montage auf Schalung oder Gipskarton mit speziellem Zubehör.




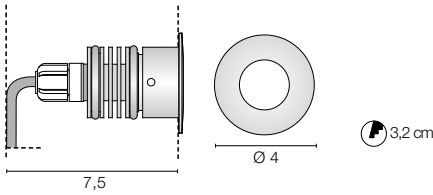

6348.33/					0,08 Kg
.33	Stainless Steel AISI 316L				III
/W	4000K	max LED 1,5W 500mA	221lm		
/WW	3000K	max LED 1,5W 500mA	210lm		
/XW	2700K	max LED 1,5W 500mA	199lm		



ETL version available upon request

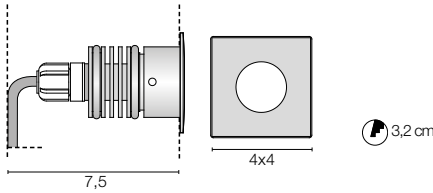

6349.33/					0,10 Kg
.33	Stainless Steel AISI 316L				III
/W	4000K	max LED 1,5W 500mA	221lm		
/WW	3000K	max LED 1,5W 500mA	210lm		
/XW	2700K	max LED 1,5W 500mA	199lm		



ETL version available upon request

ACCESSORIES

Kit
0220

Draining junction +
IP Connector

Box
0216

Plastic box


Spring for
plasterbox Included

DRIVERS

ON/OFF			
Cod.	0125	0128	0127
	350mA	350m	500mA
6348	1-6	1-10	1-6
6349	1-6	1-10	1-2

DIMMABLE			
0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
6348	2-11	2-11	1-21
6349	2-11	2-11	1-21

Only serial connection

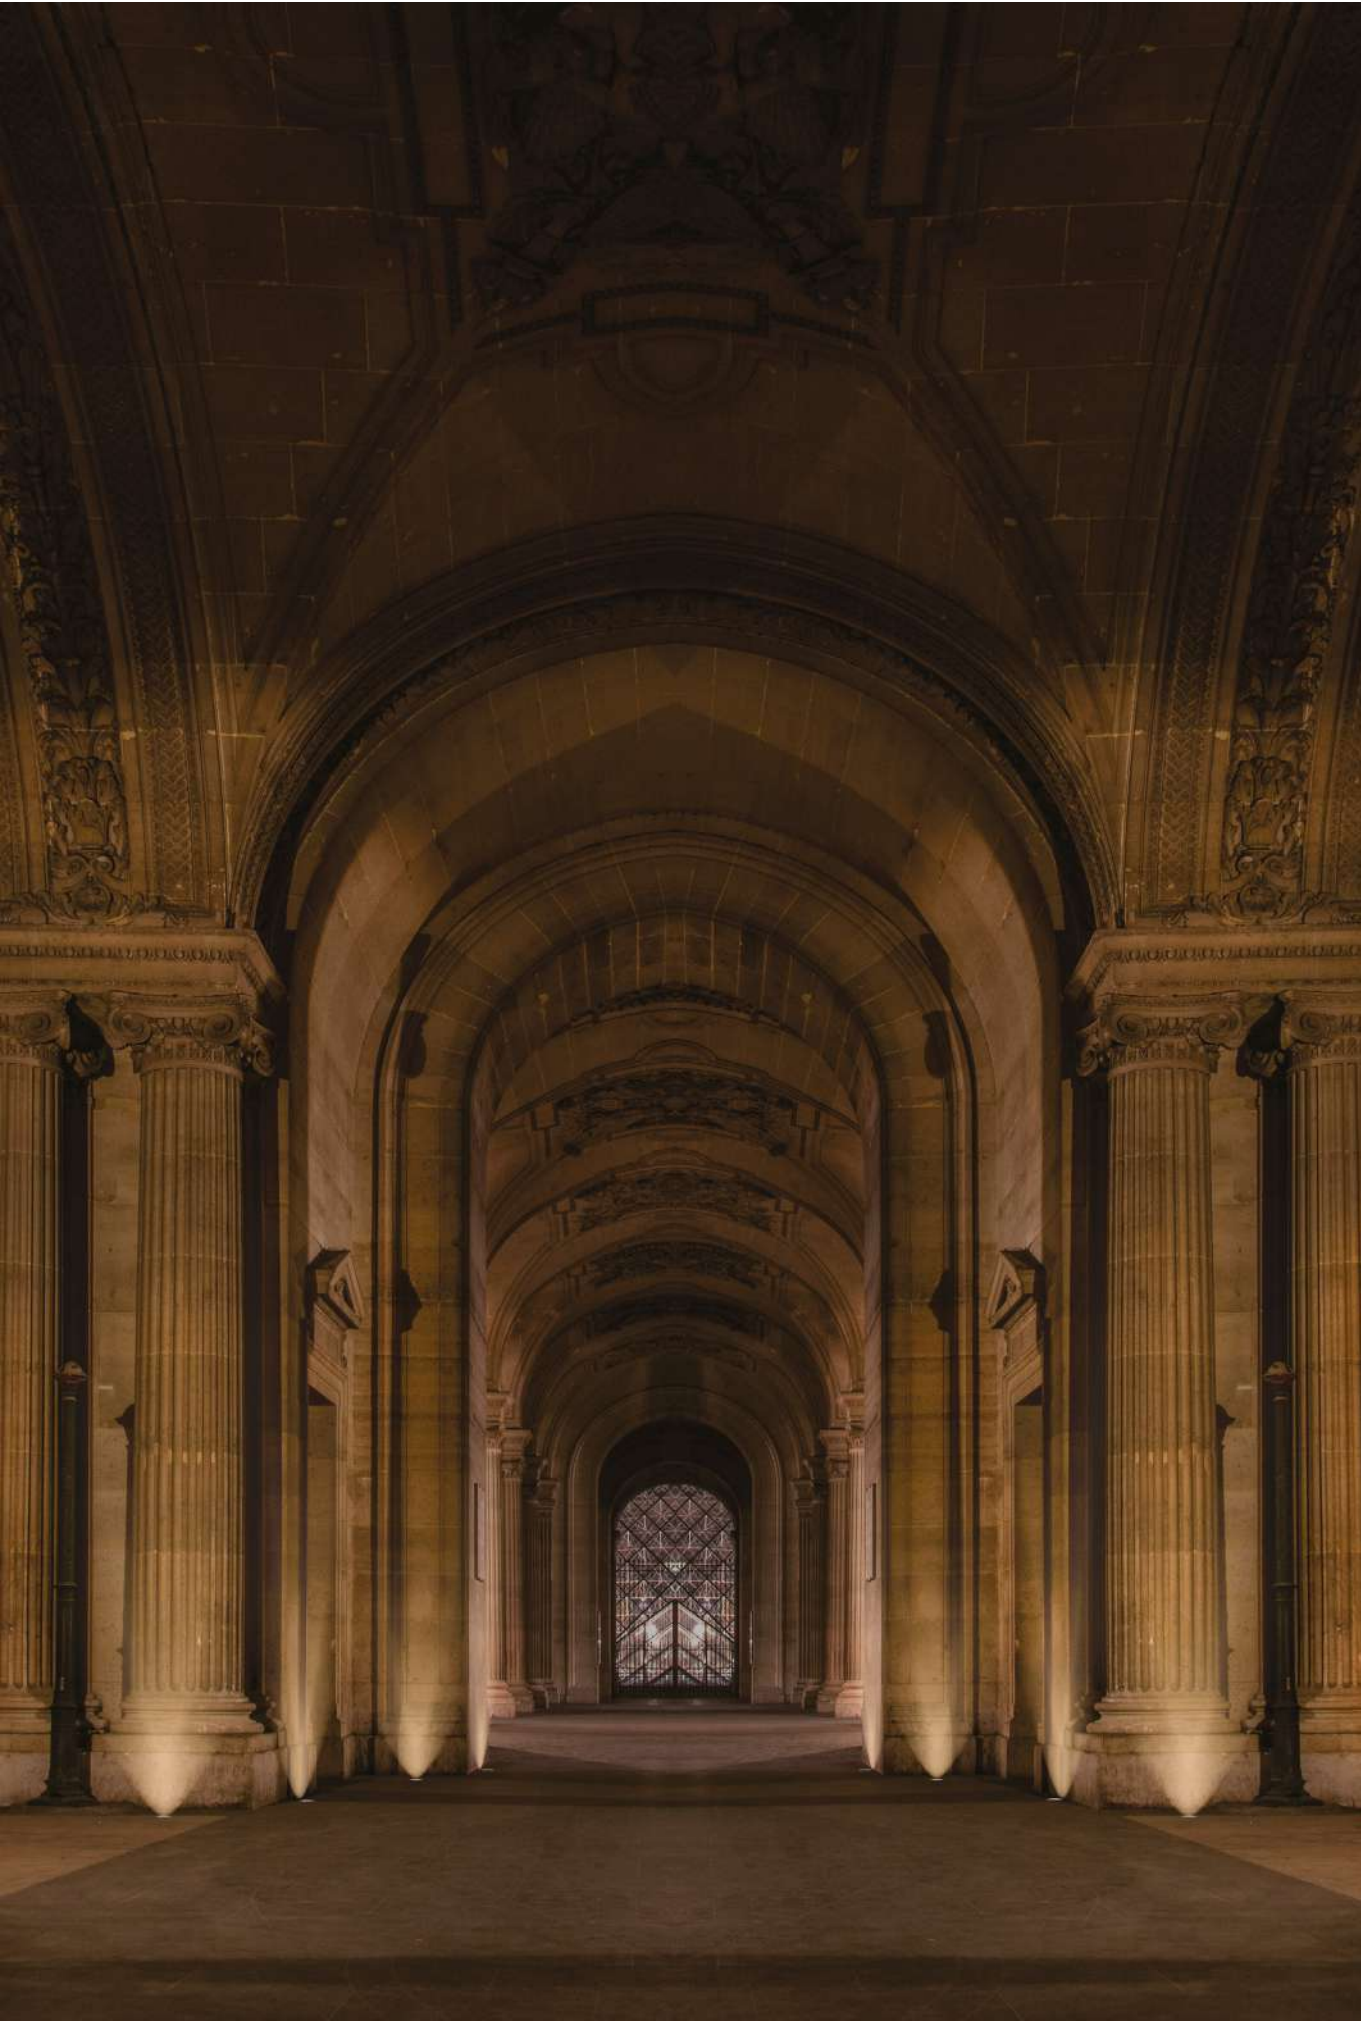

ZEPELIN RGB



6376.33/

0,20 Kg

.33

Stainless Steel AISI 316L

■

LED 3 x 250mA

F

III

IP67

100 cm

500 kg

Tc 40°C

6395.33/

0,20 Kg

.33

Stainless Steel AISI 316L

■

LED 3 x 250mA

F

III

IP67

100 cm

500 kg

Tc 40°C

ACCESSORIES

Kit

0228

Draining junction

Box

0216

Plastic box

Spring for plasterbox Included


DRIVERS

DRIVER RGB		DRIVER RGB CASAMBI	CONVERTER RGB
0164	0167	0164/CASA	0168
120W	22W	120W	IN 24V - OUT 3 X 250mA 1-5 Zeppelin RGB
IN 230V - OUT 3 X 24V		IN 230V - OUT 3 X 24V	
SENSOR & CABLE RGB			
0163			
IR Sensor			
0165			
IR Remote controller			
0166			
Sync Cable			






ZEPELIN PLUS

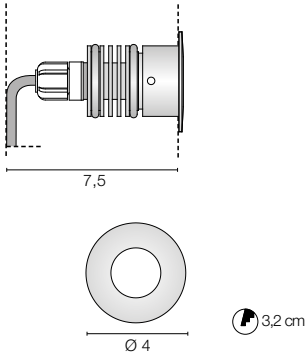

6384.33/							0,08 Kg
.33 Stainless Steel AISI 316L							III
/W	4000K	/11	/25	/45	max LED 1,5W 500mA	221lm	
/WW	3000K	/11	/25	/45	max LED 1,5W 500mA	210lm	
/XW	2700K	/11	/25	/45	max LED 1,5W 500mA	199lm	
F III IP67 30 cm 500 kg T< 40°C  R							

ETL version available upon request

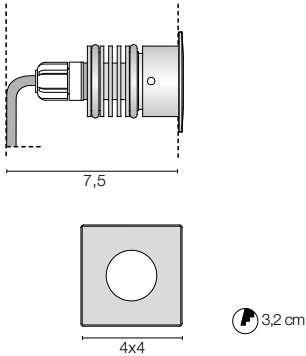

6394.33/							0,10 Kg
.33 Stainless Steel AISI 316L							
/W	4000K	/11	/25	/45	max LED 1,5W 500mA	221lm	
/WW	3000K	/11	/25	/45	max LED 1,5W 500mA	210lm	
/XW	2700K	/11	/25	/45	max LED 1,5W 500mA	199lm	
		IP67					

ETL version available upon request

ACCESSORIES

Kit
0220
Draining junction +
IP Connector

Box
0216
Plastic box

Spring for
plasterbox Included



DRIVERS

ON/OFF

Cod.	0125 350mA	0128 350m	0127 500mA
6384	1-6	1-10	1-6
6394	1-6	1-10	1-6

DIMMABLE


0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
6384 2-11	2-11	1-21	1-21
6394 2-11	2-11	1-21	1-21

Only serial connection


IP67 DRIVER

Cod.	0031/IP 350mA	0143/IP 500mA
6384	1-12	1-7
6394	1-12	1-7


ZEPELIN MAXI

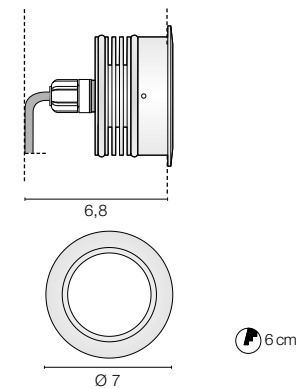

6736.33/				0,40 Kg
.33	Stainless Steel AISI 316L			III
/W	4000K	LED 4W 24V	658lm	
/WW	3000K	LED 4W 24V	608lm	
/XW	2700K	LED 4W 24V	562lm	



Only Parallel connection

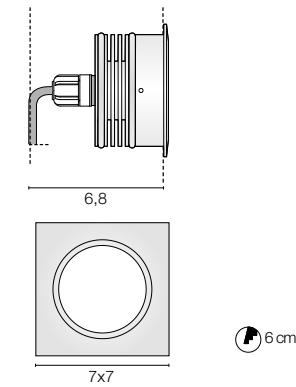

6737.33/				0,35 Kg
.33	Stainless Steel AISI 316L			III
/W	4000K	LED 4W 24V	658lm	
/WW	3000K	LED 4W 24V	608lm	
/XW	2700K	LED 4W 24V	562lm	



Only Parallel connection

ACCESSORIES

Kit
0230

Draining junction +
IP Connector

Box
0232

Wall Plastic box

Spring
0260/C

Spring for
plasterboard

6 cm



DRIVERS

ON/OFF

Cod.	0155 24V - 13W	0156 24V - 25W
6736	1-2	1-5
6737	1-2	1-5

DIMMABLE


0717/DIM60/V PUSH - 1...10V	0717/DIM60 DALI - PUSH
6736	1-12
6737	1-12

Only Parallel connection


IP67 DRIVER

Cod.	0033/IP 24V 14,4W	0037/IP 24V 60W
6736	1-2	1-12
6737	1-2	1-12

ZEPPELIN MAXI COB

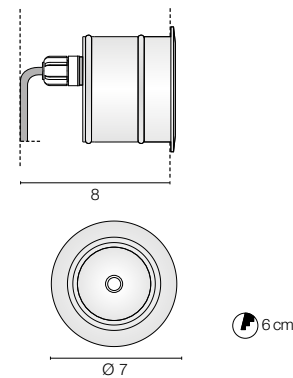

6397.33/						0,40 Kg
.33	Stainless Steel AISI 316L					II
/W	4000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1466lm
/WW	3000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1424lm
/XW	2700K	/15	/28	/60	LED 8,7W 17,5V 500mA	1340lm
F	III	IP67		30 cm	1000 kg	T<50°C

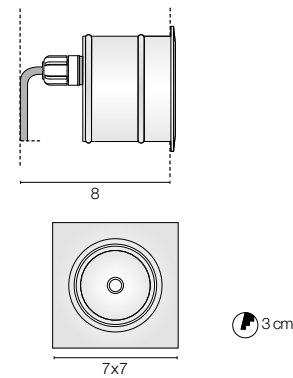

6741.33/						0,40 Kg
.33	Stainless Steel AISI 316L					II
/W	4000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1466lm
/WW	3000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1424lm
/XW	2700K	/15	/28	/60	LED 8,7W 17,5V 500mA	1340lm
F	III	IP67		30 cm	1000 kg	T<50°C

ACCESSORIES

Kit
0230
Draining junction +
IP Connector

Spring
0260/C
Spring for
plasterboard

6 cm



DRIVERS

ON/OFF

Cod.	0147/COB 500mA
6397	1-2
6741	1-2

IP67 DRIVER


Cod.	0143/IP 500mA
6397	1
6741	1

DIMMABLE


0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
6397	1-2	1-3	1-3
6741	1-2	1-3	1-3

Only serial connection

ZEPPELIN MINI



6730.33/		0,05 Kg	
.33	Stainless Steel AISI 316L		
/W	4000K	LED 1W 350mA	158lm
/WW	3000K	LED 1W 350mA	150lm
/XW	2700K	LED 1W 350mA	143lm
F III IP67 30 cm 500 kg T<40°C			



6731.33/		0,06 Kg	
.33	Stainless Steel AISI 316L		
/W	4000K	LED 1W 350mA	158lm
/WW	3000K	LED 1W 350mA	150lm
/XW	2700K	LED 1W 350mA	143lm
F III IP67 30 cm 500 kg T<40°C			



ACCESSORIES



Spring for
plasterboard included



DRIVERS

ON/OFF

Cod.	0125 350mA	0128 350mA
6730	1-6	1-10
6731	1-6	1-10

DIMMABLE


0141/DIMM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
6730 5-14	4-14	1-21	1-21
6731 5-14	4-14	1-21	1-21

Only Serial connection


IP67 DRIVER

Cod.	0031/IP 350mA
6730	1-12
6731	1-12

ZEPPELIN MINI PLUS



6732.33/										0,05 Kg
.33	Stainless Steel AISI 316L									II
/W	4000K	/11	/25	/45	LED 1W 350mA	158lm				
/WW	3000K	/11	/25	/45	LED 1W 350mA	150lm				
/XW	2700K	/11	/25	/45	LED 1W 350mA	143lm				
F	III	IP67	30 cm	500 kg	T< 40°C					



6733.33/										0,06 Kg
.33	Stainless Steel AISI 316L									II
/W	4000K	/11	/25	/45	LED 1W 350mA	158lm				
/WW	3000K	/11	/25	/45	LED 1W 350mA	150lm				
/XW	2700K	/11	/25	/45	LED 1W 350mA	143lm				
F	III	IP67	30 cm	500 kg	T< 40°C					



ACCESSORIES

Box
0215

Plastic box



Spring for
plasterboard included



DRIVERS

ON/OFF

Cod.	0125 350mA	0128 350m
6732	1-6	1-10
6731	1-6	1-10

DIMMABLE


0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
6732	5-14	4-14	1-21
6733	5-14	4-14	1-21

Only Serial connection

IP67 DRIVER

Cod.	0031/IP 350mA
6732	1-12
6733	1-12

ZEPPELIN ADJUSTABLE

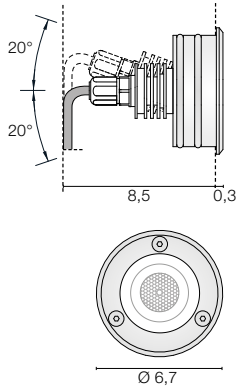

6411.33/		0,22 Kg	
.33	Stainless Steel AISI 316L		■
/W	4000K	/11 /25 /45	max LED 1,5W 500mA 221lm
/WW	3000K	/11 /25 /45	max LED 1,5W 500mA 210lm
/XW	2700K	/11 /25 /45	max LED 1,5W 500mA 199lm
F III IP67 30 cm 1000 kg T<40°C 75° R			

ETL version available upon request

ACCESSORIES

Kit
0230

Draining junction +
IP Connector

Box
0232

Wall Plastic box

Spring
0238

Spring for
plasterboard

DRIVERS

ON/OFF			
Cod.	0125	0128	0127
	350mA	350m	500mA
6411	1-6	1-10	1-6

DIMMABLE			
0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
6411	2-11	1-21	1-21

Only serial connection

IP67 DRIVER		
Cod.	0031/IP	0143/IP
	350mA	500mA
6411	1-12	1-7





OUTDOOR
JAZZ
Design FEB Rienzi





JAZZ




IP65 diffused light outdoor lamp for ceiling or wall installation with anodised aluminium body and reflector, satin methacrylate diffuser and latest generation 3000K LED module at 220/240V mains voltage. The simple line gives it an appearance that is well suited to any type of environment, from classic to modern, and to any type of context, from residential to tourist accommodation.

Lampada da esterno IP65 a luce diffusa per installazione a plafone o a parete con corpo e riflettore in alluminio anodizzato, diffusore in metacrilato satinato e modulo LED di ultima generazione a 3000K a tensione di rete 220/240V. La linea semplice le conferisce un aspetto che bene si adatta a qualsiasi tipo di ambiente, da quelli classici a quelli moderni e a qualsiasi tipo di contesto, dal residenziale a quello ricettivo turistico.

IP65-Außenleuchte mit diffusem Licht für die Decken- oder Wandmontage mit Gehäuse und Reflektor aus eloxiertem Aluminium, Diffusor aus satiniertem Methacrylat und LED-Modul der neuesten Generation mit 3000 K bei 220/240 V Netzspannung. Die schlichte Linie verleiht ihr ein Erscheinungsbild, das sich für jede Art von Umgebung eignet, von klassisch bis modern, und für jede Art von Kontext, vom Wohnbereich bis zur Touristenunterkunft.

JAZZ

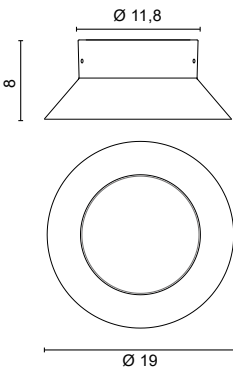

5538		0,60 Kg	
.01	White		
.02	Black		
.38	Shiny Copper		
/WW	3000K	LED 8,7W	670lm
F	IP65		



FINISHES CODES



.01 White .02 Black .38 Shiny Copper



OUTDOOR
ROC

Design FEB Rienzi





ROC



IP65 outdoor lamp for wall or ceiling installation with latest generation 3000K 670lm LED module at 220/240V mains voltage.

Die-cast aluminium structure with thick anodising treatment and matt white polyester paint finish. The outer diffuser is in moulded, ground, transparent glass, the inner one in satin-finish methacrylate. Stainless steel screws and silicone seals.

Roc is designed for lighting outdoor spaces, porches, terraces and all open architectural environments exposed to the weather. The essential line and the quality of the materials also make it suitable for indoor environments such as bathrooms and rooms where an IP44 or higher degree of protection is required.

The mains-voltage powered LED light source, protected by an opal screen, provides all the high efficiency and energy-saving advantages of the technology, while at the same time guaranteeing diffuse and pleasant direct light.

The luminaire is supplied with an additional seal that forms a barrier to insect penetration between the glass and the inner body.

Lampada da esterno IP65 per installazione a parete o plafone con modulo LED di ultima generazione 3000K da 670lm a tensione di rete 220/240V.

Struttura in alluminio pressofuso con trattamento di anodizzazione in spessore e verniciatura in poliestere bianco opaco. Il diffusore esterno è in vetro trasparente stampato, molato e sfaccettato, quello interno in metacrilato satinato. Viti in acciaio INOX e guarnizioni di tenuta siliconiche.

Roc è pensata per l'illuminazione di spazi esterni, porticati, terrazze e tutti gli ambienti architettonici aperti, esposti agli agenti atmosferici. La linea essenziale e la qualità dei materiali la rendono adatta anche per ambienti interni come bagni e locali dove è richiesto un grado di protezione IP44 o superiore.

La sorgente luminosa LED alimentata a tensione di rete, protetta da uno schermo opalino, permette di avere tutti i vantaggi di alta efficienza e risparmio energetico della tecnologia e al tempo stesso garantisce una luce diretta diffusa e gradevole.

La lampada è fornita con una guarnizione supplementare che costituisce una barriera per la penetrazione di insetti tra vetro e corpo interno..

IP65-Außenleuchte für Wand- oder Deckenmontage mit LED-Modul der neuesten Generation mit 3000K und 670lm bei 220/240V Netzspannung.


Struktur aus druckgegossenem Aluminium mit starker Eloxierung und matweißer Polyesterlackierung. Der äußere Diffusor besteht aus geschliffenem, transparentem Glas, der innere aus satiniertem Methacrylat. Schrauben aus rostfreiem Stahl und Silikondichtungen.

Roc ist für die Beleuchtung von Außenbereichen, Veranden, Terrassen und allen offenen architektonischen Umgebungen, die dem Wetter ausgesetzt sind, konzipiert. Aufgrund ihrer klaren Linie und der Qualität der Materialien eignet sie sich auch für Innenräume wie Bäder und Zimmer, in denen ein Schutzgrad von IP44 oder höher erforderlich ist.

Die netzgespeiste LED-Lichtquelle, die durch eine opale Abschirmung geschützt ist, bietet alle Vorteile dieser Technologie in Bezug auf Effizienz und Energieeinsparung, während sie gleichzeitig ein diffuses und angenehmes direktes Licht garantiert.

Die Leuchte wird mit einer zusätzlichen Dichtung geliefert, die eine Barriere gegen das Eindringen von Insekten zwischen dem Glas und dem Innenkörper bildet.

ROC

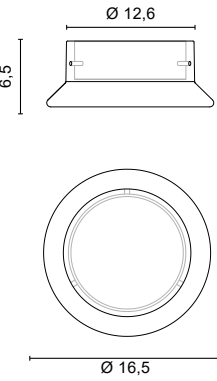

5539	1,50 Kg
.01 White	
/WW 3000K LED 8,7W 670lm	
F IP65	



FINISHES CODES



.01 White





OUTDOOR

DRUM

Design UT EgoLuce





DRUM



IP65 ceiling or wall lamp with an anodised aluminium structure and reinforced outdoor finish, methacrylate diffuser and 10W 220-240V LED module.

The simple line gives it an appearance that is well suited to any type of environment, from classic to modern interiors and any type of context, from residential to tourist accommodation.


Lampada da plafone o parete IP65 con struttura in alluminio anodizzato e finitura rinforzata per esterno, diffusore in metacrilato e modulo LED 10W 220-240V.

La linea semplice le conferisce un aspetto che bene si adatta a qualsiasi tipo di ambiente, dagli interni classici a quelli moderni e a qualsiasi tipo di contesto, dal residenziale a quello ricettivo turistico.

Decken- oder Wandleuchte IP65 mit Struktur aus eloxiertem Aluminium und verstärkter Oberfläche für den Außenbereich, Diffusor aus Methacrylat und LED-Modul 10W 220-240V.

Die schlichte Linie verleiht ihr ein Erscheinungsbild, das sich für jede Art von Umgebung eignet, von klassischen bis zu modernen Innenräumen und jeder Art von Kontext, von Wohn- bis zu Touristenunterkünften.

DRUM



5520		1,30 Kg
.01	White	
.45	Anodized aluminium	
/WW	3000K LED 8,7W	670lm
 IP65  		



FINISHES CODES



.01 White .45 Anodized aluminium



Our fittings are manufactured in conformity with the european standard CEI-EN 60598 and, consequently, get the mark CE.

Nos appareils sont fabriqués en conformité aux règles européennes CEI-EN 60598 et, par conséquence, fournis avec marque CE.

Unsere Produkte werden gemäss europäischer Norm CEI-EN 60598 hergestellt und sind als solche mit dem CE-Zeichen gekennzeichnet.

Egoluce s.r.l. reserves the right to change, at any time and without prior warning, the technical specification of any product illustrated in this catalogue.
Colours are simply indicative of the real nuance.

*Egoluce s.r.l. se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.
Les couleurs sont simplement a titre indicatif.*

*Egoluce s.r.l. behält sich vor, jederzeit und fristlos die in beiliegendem Katalog erläuterten technischen Daten zu ändern.
Die Farben sind nicht genau wirklichkeitsgetreu.*





MADE IN ITALY

EGOLUCE s.r.l.

Via I. Newton, 12 - 20016 Pero - Milano - Italy

Tel. +39 02339586.1 - Italia fax +39 023535112 - Int. fax +39 0233911087

E-mail: export@egoluce.com - Int. E-mail: infoworld@egoluce.com

www.egoluce.com